



# RISH XMER 86 SERIES

RISH XMER 86-40

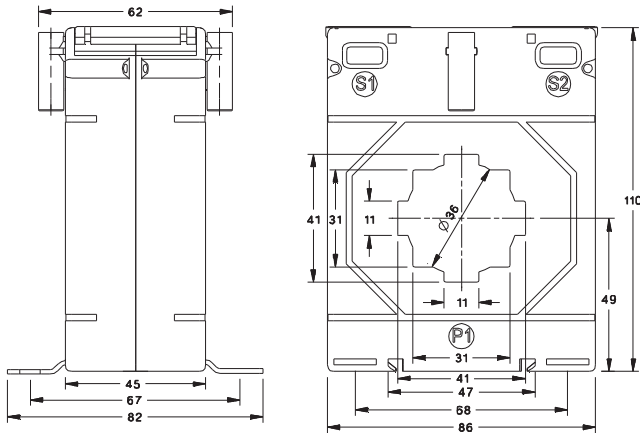


Primary Current	RISH XMER 86/40 (45)			
	Accuracy			
	0.2S	0.2	0.5	1.0
50A	-	-	-	1.5VA
60A	-	-	-	1.5VA
75A	-	-	-	2.5VA
80A	-	-	-	2.5VA
100A	1.5VA	1.5VA	1.5VA	3.75VA
120A	1.5VA	1.5VA	2.5VA	5VA
125A	1.5VA	1.5VA	2.5VA	5VA
150A	2.5VA	2.5VA	3.75VA	5VA
200A	2.5VA	2.5VA	5VA	7.5VA
250A	3.75VA	3.75VA	7.5VA	12.5VA
300A	3.75VA	5VA	10VA	15VA
400A	3.75VA	7.5VA	15VA	20VA
500A	5VA	10VA	20VA	30VA
600A	7.5VA	15VA	30VA	30VA
750A	7.5VA	15VA	30VA	30VA
800A	10VA	15VA	30VA	30VA
1000A	10VA	15VA	30VA	30VA

RISH XMER 86-50

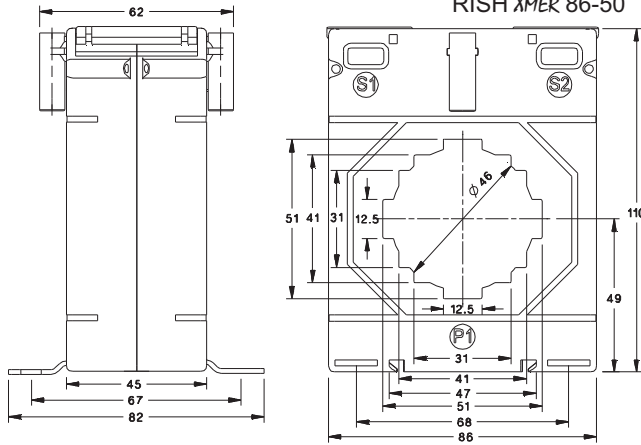

Primary Current	RISH XMER 86/50 (45)			
	Accuracy			
	0.2S	0.2	0.5	1.0
100A	-	-	-	1.5VA
120A	-	-	1.5VA	2.5VA
125A	-	-	1.5VA	2.5VA
150A	-	-	2.5VA	5VA
200A	-	-	5VA	7.5VA
250A	-	-	7.5VA	10VA
300A	1.5VA	1.5VA	7.5VA	10VA
400A	2.5VA	2.5VA	15VA	15VA
500A	2.5VA	5VA	15VA	20VA
600A	5VA	7.5VA	15VA	20VA
750A	7.5VA	10VA	15VA	20VA
800A	10VA	12.5VA	20VA	30VA
1000A	12.5VA	20VA	30VA	30VA
1200A	12.5VA	20VA	30VA	30VA
1250A	12.5VA	20VA	30VA	30VA

RISH XMER 86-60

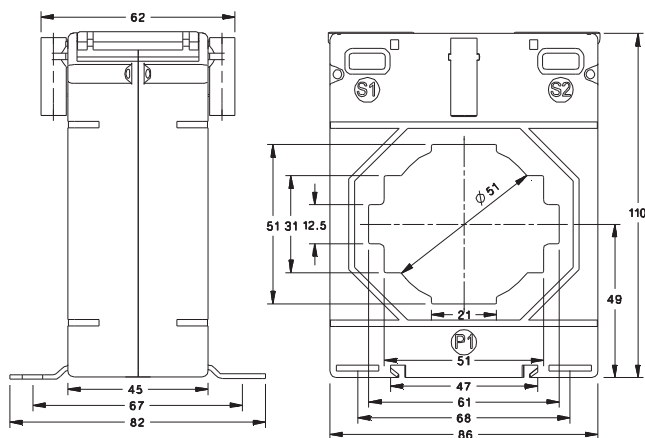

Primary Current	RISH XMER 86/60 (45)			
	Accuracy			
	0.2S	0.2	0.5	1.0
100A	-	-	-	1VA
120A	-	-	-	1.5VA
125A	-	-	-	2.5VA
150A	-	-	-	2.5VA
200A	-	-	1.5VA	3.75VA
250A	-	-	2.5VA	5VA
300A	1.5VA	1.5VA	5VA	7.5VA
400A	2.5VA	2.5VA	10VA	12.5VA
500A	2.5VA	3.75VA	10VA	12.5VA
600A	5VA	5VA	15VA	15VA
750A	5VA	10VA	15VA	20VA
800A	7.5VA	12.5VA	20VA	20VA
1000A	10VA	15VA	20VA	20VA
1200A	10VA	15VA	20VA	20VA
1250A	10VA	15VA	20VA	20VA
1500A	10VA	15VA	20VA	20VA
1600A	10VA	15VA	20VA	20VA

ALL DIMENSIONS ARE IN MM