




➤ EMT ELBOWS/BENDS

EMT elbow is manufactured from prime EMT conduit in accordance with the latest specifications and standards of ANSI C80.3(UL797).

The interior and exterior surface of elbows are free from defect with a smooth welded seam, and also are thoroughly and evenly coated with zinc using hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, and surface of elbows with a clear post-galvanizing coating to provide further protection against corrosion.

Elbows are produced in normal trade sizes from 1/2" to 4", the degree including 90 deg, 60 deg, 45 deg, 30 deg, 22.5 deg, 15deg or according customer's request .

The elbows are used to connect the EMT conduit to change the way of the conduit.

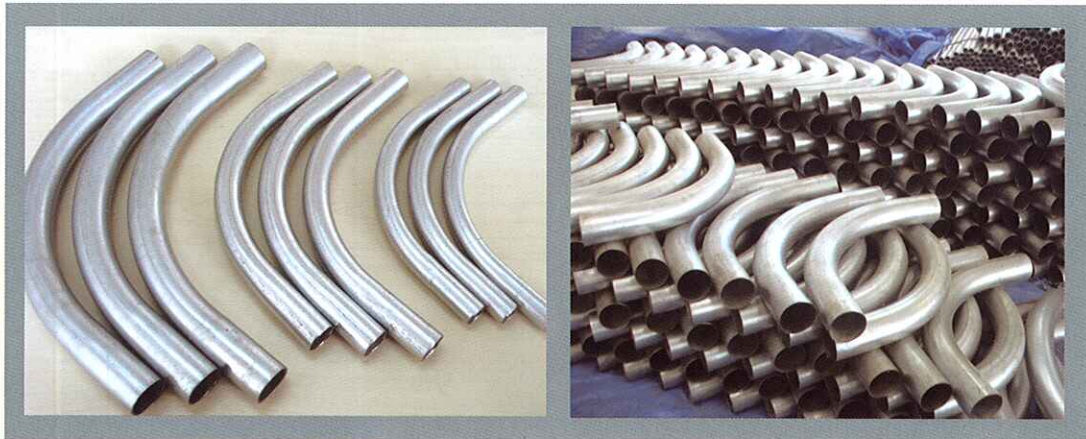

Dimension and Packing Chart (90°)

Pipe Size(in)	Mini.UL Radius(mm)	Straight Length "T"(mm)	Offset "H"(mm)	Weight Per 100 pcs(KG)	Weight Per 100 pcs(LBS)	Standard Carton Qty	Weight Per Carton(KG)
1/2"	102	72	174	13.5	30	50	6.75
3/4"	114	74	188	22.2	49	50	11.10
1"	146	76	222	38.2	84	25	9.56
1-1/4"	184	84	268	68.4	151	20	13.67
1-1/2"	210	92	302	89.1	196	15	13.36
2"	241	108	349	130.9	288	10	13.09
2-1/2"	267	135	402	221.2	488	50	110.58
3"	330	156	486	326.6	720	35	114.3
3-1/2"	381	171	552	487.1	1074	25	121.76
4"	406	181	587	583.0	1285	25	145.76

Dimension and Packing Chart (60°)

Pipe Size(in)	Mini.UL Radius(mm)	Straight Length "T"(mm)	Offset "H"(mm)	Weight Per 100 pcs(KG)	Weight Per 100 pcs(LBS)	Standard Carton Qty	Weight Per Carton(KG)
1/2"	102	70	172	10.9	24	50	5.46
3/4"	114	74	188	18.1	40	50	9.07
1"	146	76	222	30.6	67	25	7.65
1-1/4"	184	82	266	53.3	118	20	10.66
1-1/2"	210	90	300	69.2	153	15	10.38
2"	241	109	350	103.6	228	10	10.36
2-1/2"	267	130	397	173.2	382	50	86.58
3"	330	158	488	260.2	574	35	91.08
3-1/2"	381	172	553	384.8	848	25	96.20
4"	406	181	587	459.3	1012	25	114.82