
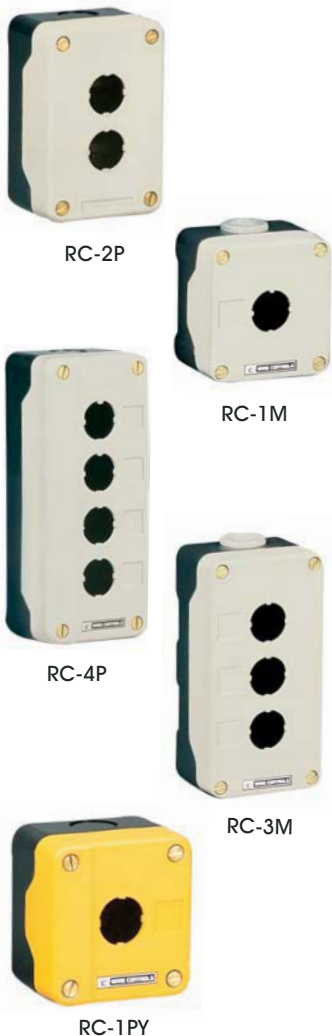


Control Stations



















Characteristics

General Characteristics	
Products	Control Stations
Reference Standard	IEC 947-5-1, EN 60947-5-1, IEC 337-1, UL 508, CSA C-22-2 n° 14
Approval	U _I , C _U & 
Protection Degree	IP 65 / IP 66 (as per IEC), NEMA 4 / 4X (special version)
Ambient Temperature	-40°C ~ + 70°C (Storage) -25°C ~ +70°C (Operation)
Vibration Resistance	15g (40 To 500 Hz) conforming to IEC 68-2-6
Shock Resistance	Push Buttons : 70g, Mushroom Head Push Buttons : 15g, Selector Switches : 200g conforming to IEC 68-2-27
Material and Colour	Thermoplastic - grey lid and black base for 1,2,3,4 way, yellow lid & black base for one way Aluminium Die Cast - grey lid and dark grey base
Cable Entry	Knock-outs provided



Stations for customer assembly

Empty Control Station Enclosures for customer assembly in plastic & metal

Description	No. of Holes	Colour	Reference
CONTROL STATION PLASTIC ENCLOSURE	1	LID  BASE 	RC-1P
	2	LID  BASE 	RC-2P
	3	LID  BASE 	RC-3P
	4	LID  BASE 	RC-4P
	1	LID  BASE 	RC-1PY
CONTROL STATION METAL ENCLOSURE	1	LID  BASE 	RC-1M
	2	LID  BASE 	RC-2M
	3	LID  BASE 	RC-3M
	4	LID  BASE 	RC-4M