



561.1683




BASE ENCLAV. MEC.

16A 2P+T 6h 200-250V 50Hz 60Hz

106X240MM Con enclavamiento mecánico

Product Approvals

TECHDATA		STANDARDS AND LAWS	
Tipo de producto	BASE ENCLAV. MEC.	EN 60309-1 (1999)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements
Serie comercial	Serie ADVANCE 2	EN 60309-2 (1999)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations
Descripción sintética	BASE ENCLAV. MEC.		
Tipo de instalación	MURAL		
Intensidad nominal	16A	EN 60309-1/A1 (2007)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements
Polos	2P+T	EN 60309-2/A1 (2007)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations
Posición de hora	6h		
Tensión nominal (range)	200-250V	EN 60309-4 (2007)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Switched socket-outlets and connectors, with or without interlock
Tensión nominal	200-250V		
Frecuencia nominal	60Hz	EN 60309-1/A2 (2012)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements
Frecuencia nominal	50Hz	EN 60309-2/A2 (2012)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations
Color	AZUL		
Grado de protección	Watertight		
Grado de protección IP	IP66/IP67	EN 60309-4/A1 (2012)	[European Standard] Plugs, socket-outlets and couplers for industrial purposes. - Switched socket-outlets and connectors, with or without interlock
Brida de Fijación	106X240MM		
Salida del cable	M25X1,5	DIRECTIVE LOW VOLTAGE 2014/35 /UE	[European Directives] Low Voltage Directive
Opciones	Con enclavamiento mecánico		
Notas	SENZA BASE PORTAFUSIBILI		

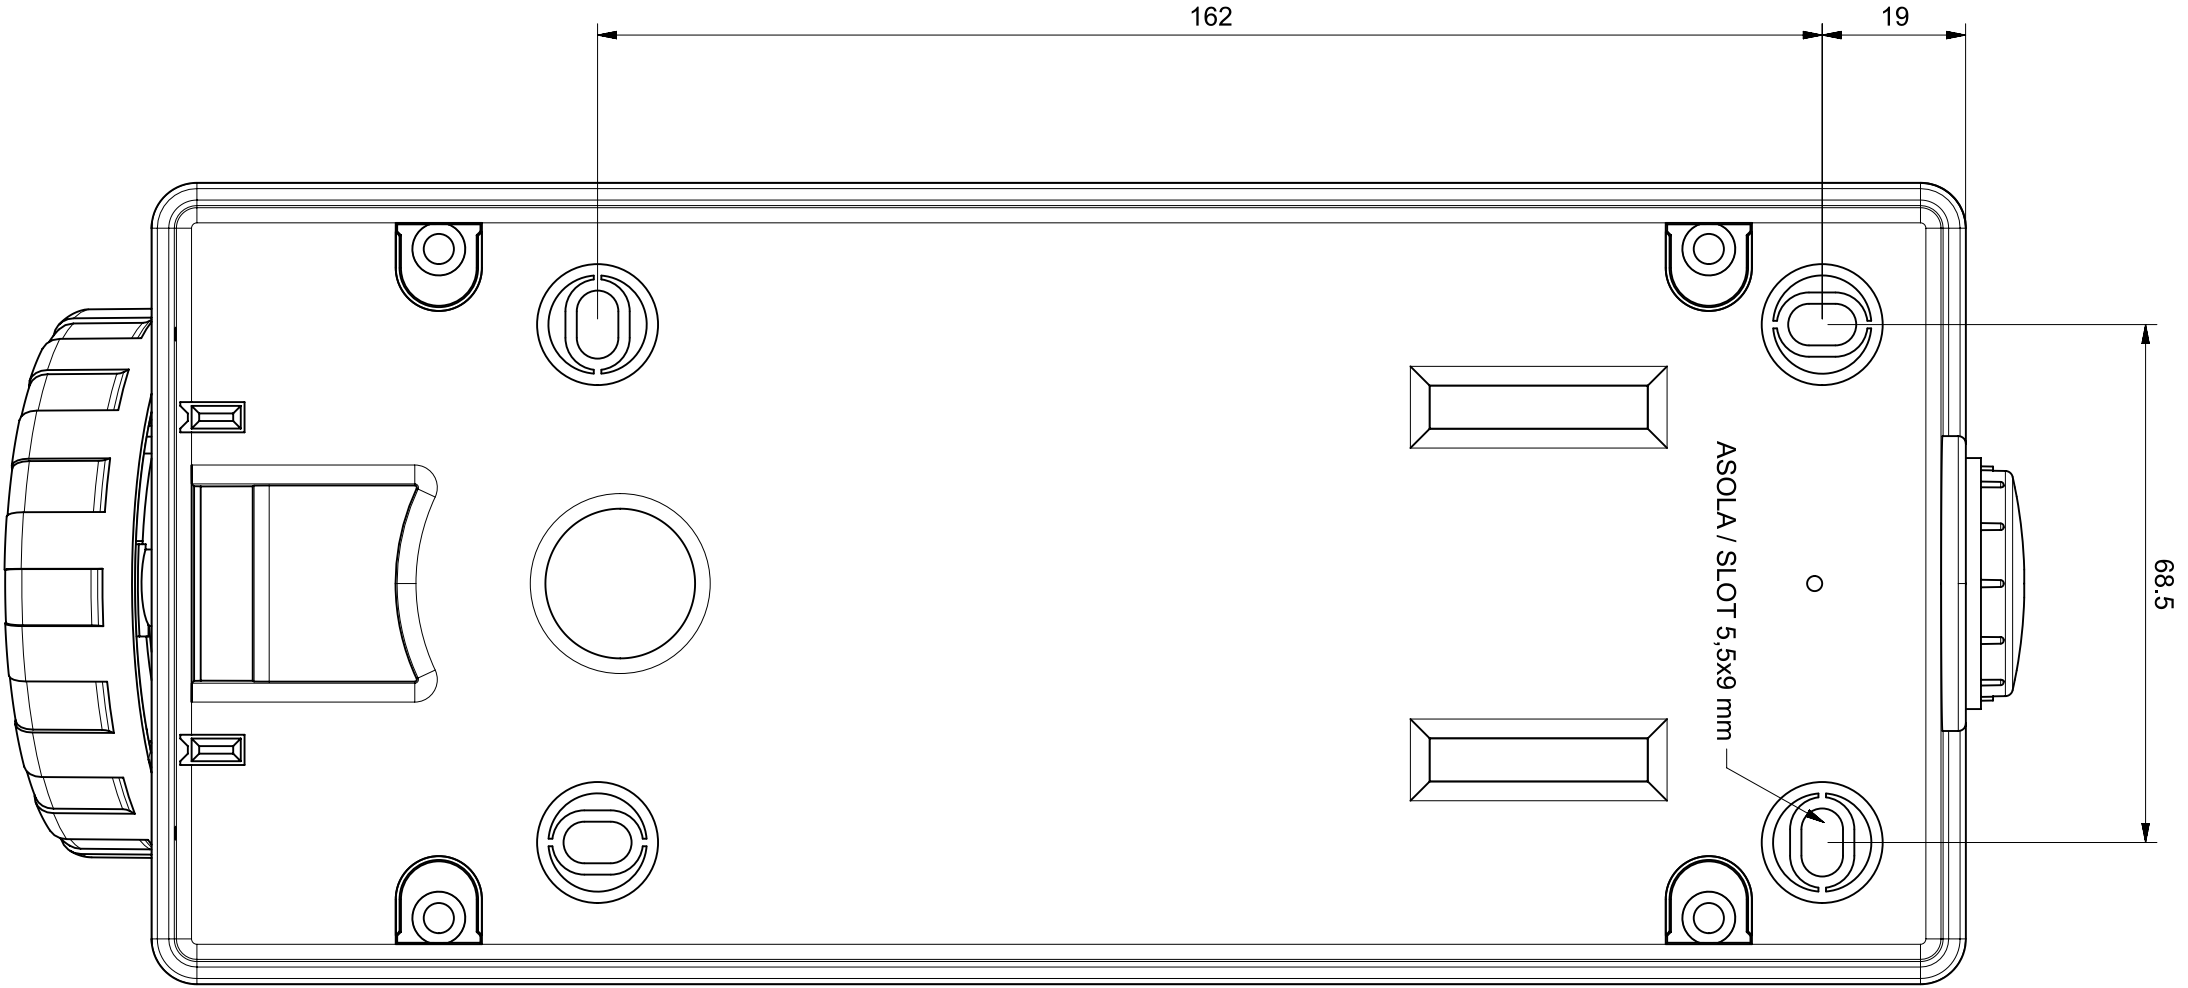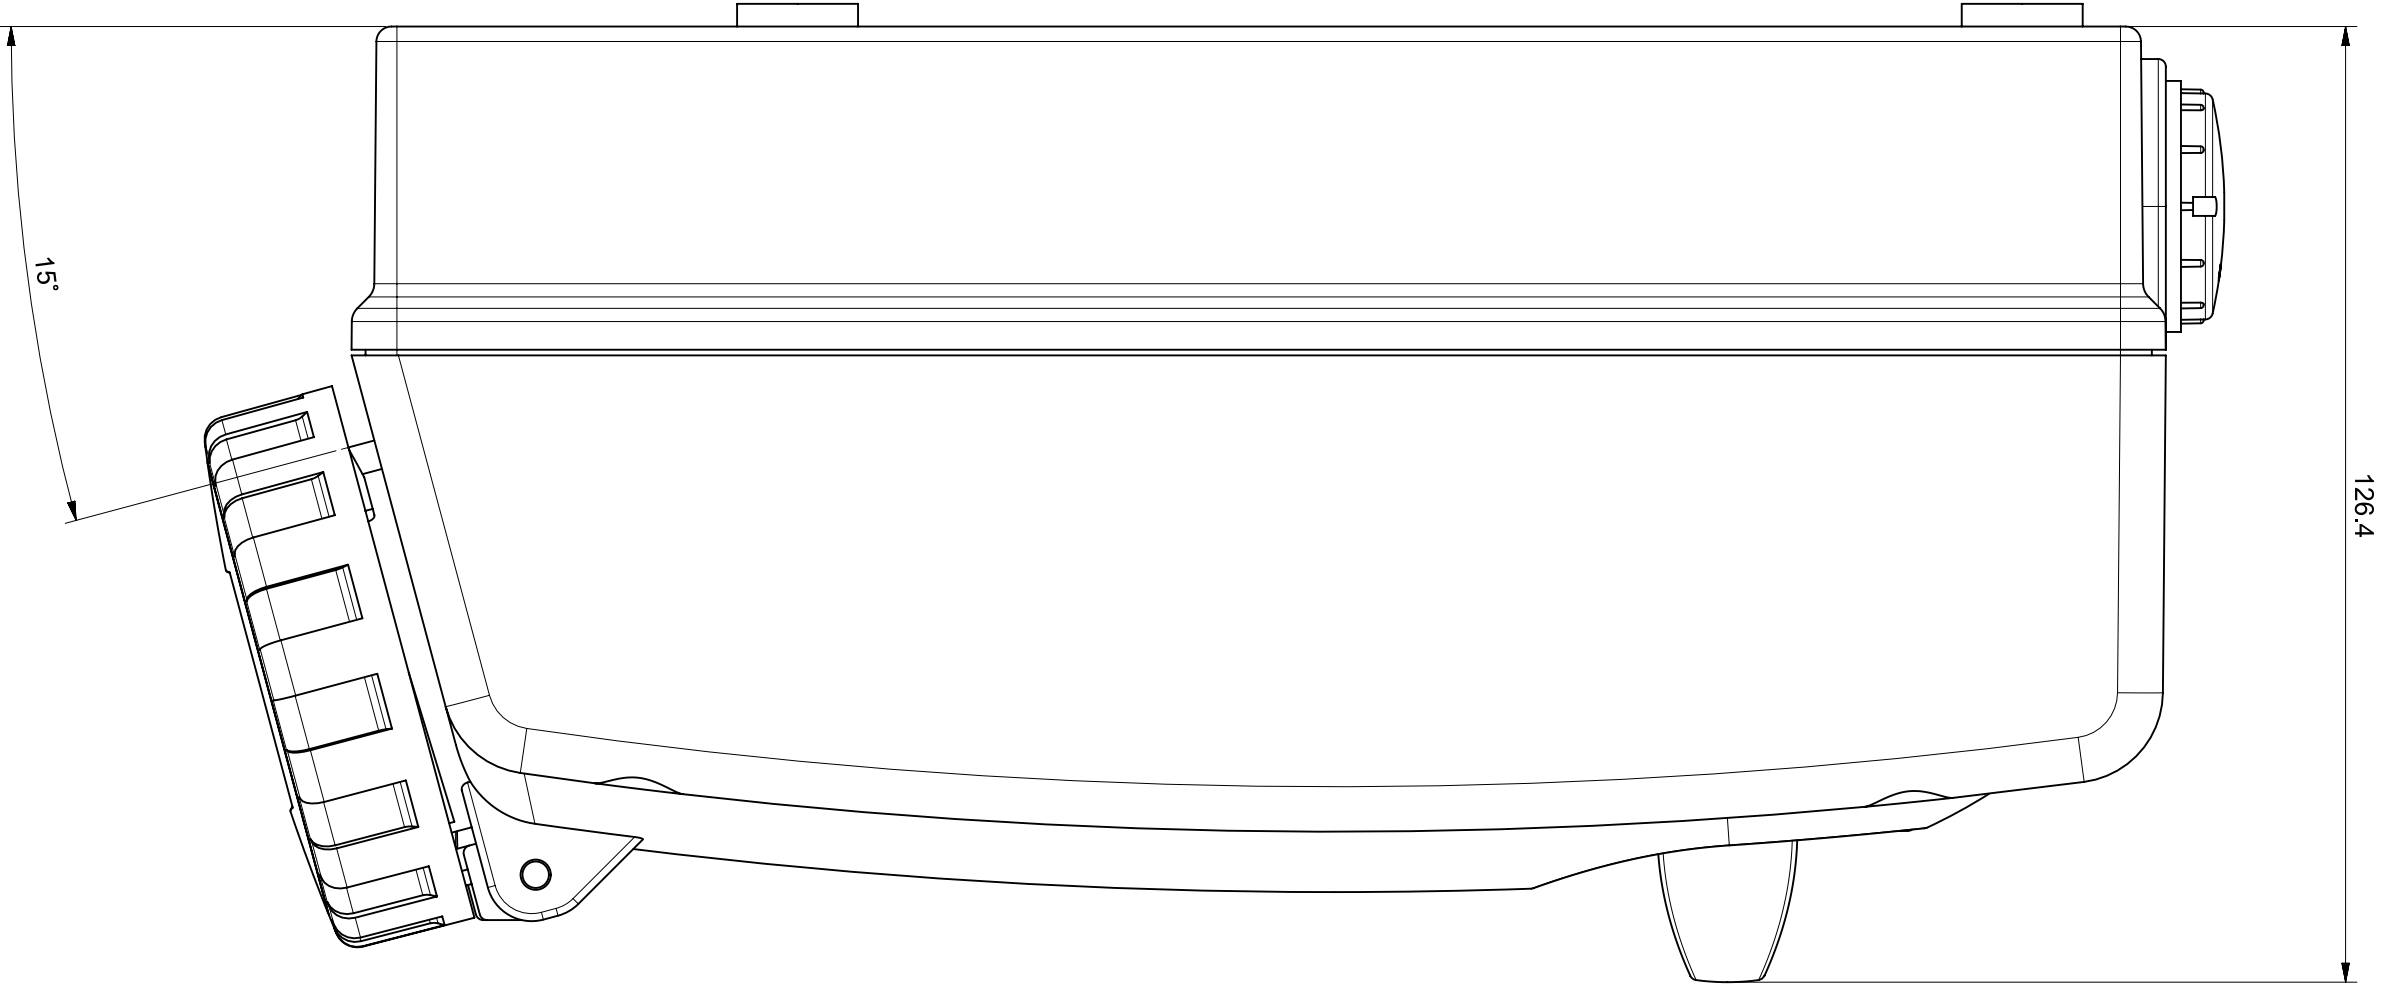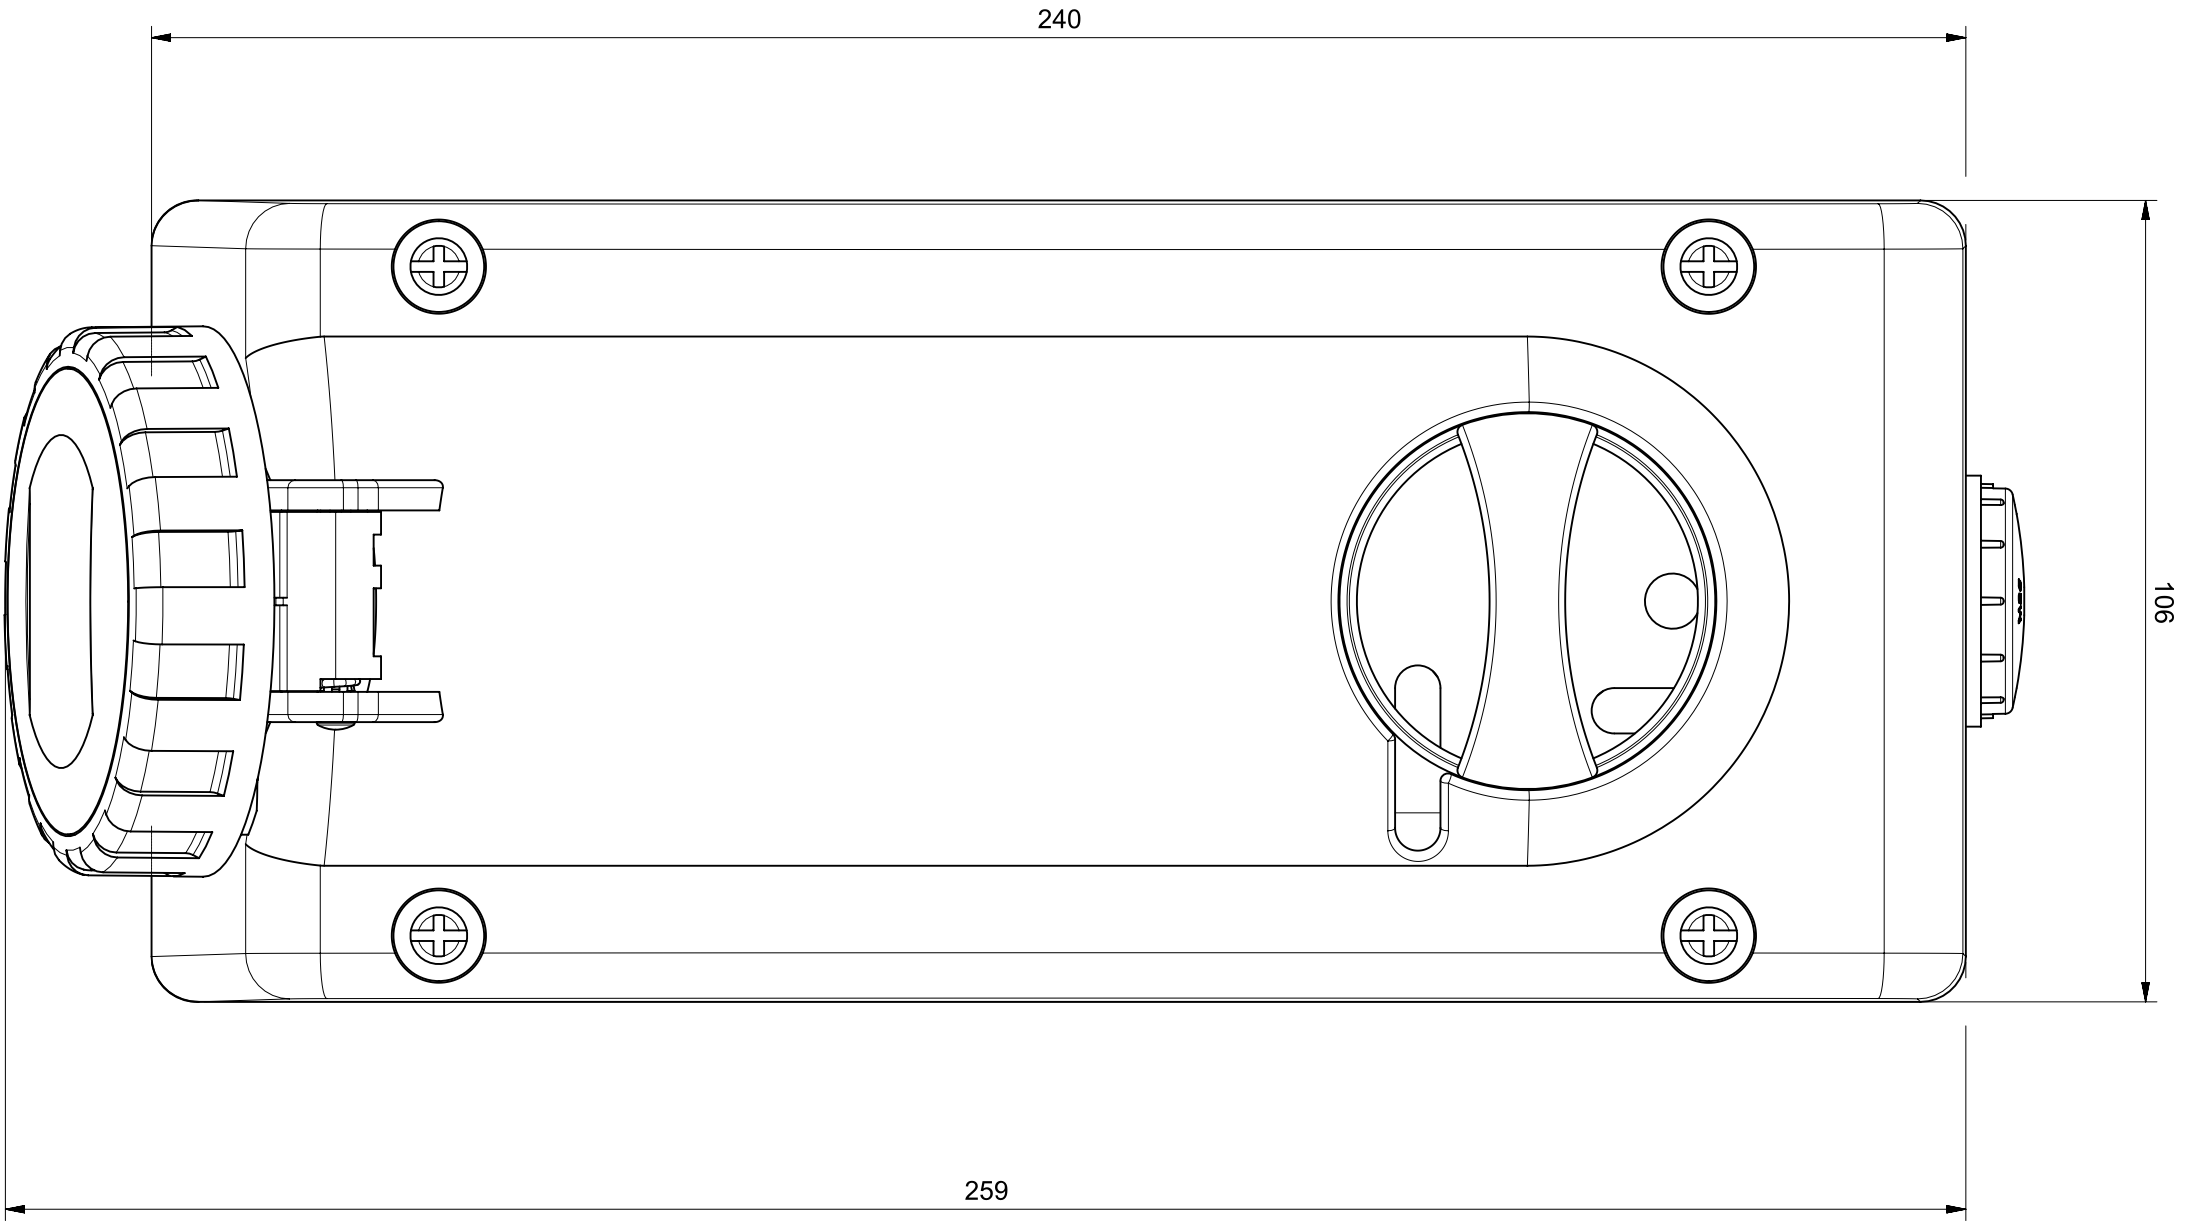

At the end of the law, we reserve the ownership of this design may not be copied and transfer it to third parties or competitors	Formal	A2	Scale	1:1	Mould N°			Drawn	SCAME
	Tolerances for linear and angular dimensions without indication of specific tolerances: JS13 / UNI 286-1:2010							Date	
	DESCRIPTION								Approved
PRESA ADVANCE 2 2P+T 16A IP67 SENZA FUSIBILI								CODE	Sheet 1 / 1
SCAME S.p.A. PARRE - (Bergamo)								4003538	