

Prodotti per carrelli elevatori

Products for forklift trucks

V 10÷100		V 20÷80		Flash/min. 1F: 60÷130 2F: 2x75±10	IP 54
°C -30 +40	On 		2	PC	autoestinguente self-extinguishing

Luce xeno multitensione - monolampo Multi-voltage xenon flashing beacon - single flash




ELEBLITZ 10÷100V 1F
ELEBLITZ1F10100

①

1F	V 	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	650	950	830	870	970
	V 	20 ÷ 48 ÷ 80				
	mA	240		280		240
	Cd(p)	800		880		950

ELEBLITZ1F10100D2 • 84561



Kg 0,36

Luce xeno multitensione - monolampo o bilampo Multi-voltage xenon flashing beacon - single or double flash




FLASH ELEV 10÷100V 1F-2F
FLELB1F10100

①


1F	V 	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	1000	1450	1500	1550	1600
	V 	20 ÷ 48 ÷ 80				
	mA	240		280		240
	Cd(p)	800		1050		1100
2F	V 	10 ÷ 100				
	mA	220 ÷ 50				
	Cd(p)	900 750				

FLELB1F10100D2 • 84524
FLELB2F10100D2 • 84583



Kg 0,45

Luce xeno multitensione - monolampo Multi-voltage xenon flashing beacon - single flash




FLC 1200 10÷100V 1F
FLC12001F10100

①

1F	V 	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	950	1650	1650	1650	1700
	V 	20 ÷ 48 ÷ 80				
	mA	240		280		240
	Cd(p)	800		910		1000

FLC12001F10100D2 • 84567



Kg 0,23

Luce xeno multitensione - monolampo Multi-voltage xenon flashing beacon - single flash




FLT ELEV 10÷100V 1F
FLTELEV1FL10100

①

1F	V 	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	1000	1450	1500	1550	1600
	V 	20 ÷ 48 ÷ 80				
	mA	240		280		240
	Cd(p)	1350		1400		1450

FLTELEV1FL10100V • 84608



Kg 0,35

V 10÷100	==	V 20÷80	~	Flash/min. 1F: 60÷130	IP 54
°C -30 +40	On ∞			2 PC	autoestinguente self-extinguishing

Luce xeno multitemensione - monolampo Multi-voltage xenon flashing beacon - single flash




MICRODOT ISO B ELEV
10÷100V 1F
MRTISOBEL10100

(8)

1F	V ==	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	550	920	940	940	960
	V ~	20 ÷ 48 ÷ 80				
	mA	240	280	240		
	Cd(p)	850	910	1000		

MRTISOBEL10100D2 • 84547

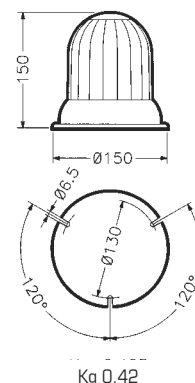

Kg 0,42

Luce xeno multitemensione - monolampo Multi-voltage xenon flashing beacon - single flash




MINIFRESNEL ISO B ELEV
10÷100V 1F
MFRISOBEL1F10100

(8)

1F	V ==	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	650	1130	1130	1130	1130
	V ~	20 ÷ 48 ÷ 80				
	mA	240	280	240		
	Cd(p)	800	1050	1100		

MFRISOBEL1F10100D2 • 84582

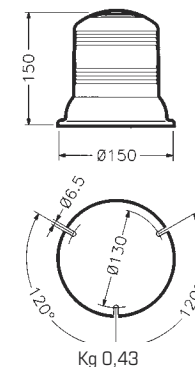

Kg 0,43

Luce xeno multitemensione - monolampo Multi-voltage xenon flashing beacon - single flash




MINITRUCK 120
10÷100V 1F
MTRUCK1201F10100

(1)

1F	V ==	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	650	850	950	970	970
	V ~	20 ÷ 48 ÷ 80				
	mA	240	280	240		
	Cd(p)	800	960	985		

MTRUCK1201F10100D2 • 84628



Kg 0,38

Luce xeno multitemensione - monolampo Multi-voltage xenon flashing beacon - single flash




SFEROFLASH
10÷100V 1F
SFERO1F10100

(1)

1F	V ==	10 ÷ 24 ÷ 48 ÷ 80 ÷ 100				
	mA	270	190	110	75	60
	Cd(p)	850	1150	1300	1500	1500
	V ~	20 ÷ 48 ÷ 80				
	mA	240	280	240		
	Cd(p)	1300	1350	1400		

SFERO1F10100D2 • 84546



Kg 0,26

Prodotti per carrelli elevatori

Products for forklift trucks

V 10÷100		V 20÷80		Flash/min. 1F: 60÷130 2F: 2x75±10	IP 20
SL: 	---	°C -30 +40	On 	 2	PC

Luce xeno multitensione - monolampo o bilampo - con segnale acustico incorporato
Multi-voltage xenon flashing beacon - single or double flash - with built-in audible signal




FLASH ELEV SL
10÷100V 1F-2F
FLESL1F10100

①

1F	V 	10 ÷ 100
	mA	220 ÷ 50
	Cd(p)	1800
	dB(A)1m	75 ÷ 85
	Hz	2500 ± 100

2F	V 	10 ÷ 100
	mA	220 ÷ 50
	Cd(p)	900 750
	dB(A)1m	75 ÷ 85
	Hz	2500 ± 100

FLESL1F10100D2 • 84514
 FLESL2F10100D2 • 84584

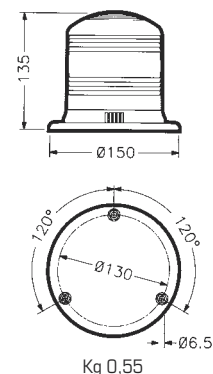

Luce xeno multitensione - monolampo - con segnale acustico incorporato
Multi-voltage xenon flashing beacon - single flash - with built-in audible signal




MICROROT ISO B ELEV SL
10÷100V 1F
MRTISOBELSL1F10100

⑧

1F	V 	10 ÷ 100
	mA	220 ÷ 50
	Cd(p)	1000
	dB(A)1m	75 ÷ 85
	Hz	2500 ± 100

MRTISOBELSL1F10100D2 • 84575

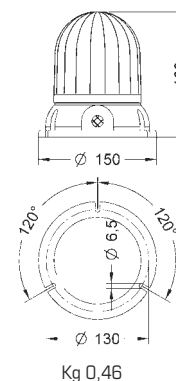

Luce xeno multitensione - monolampo con segnale acustico incorporato
Multi-voltage xenon flashing beacon - single flash - with built-in audible signal



MINIFRESNEL ISO B ELEV SL
10÷100V 1F
MFRISOBELSL1F10100

⑧

1F	V 	10 ÷ 100
	mA	220 ÷ 50
	Cd(p)	1800
	dB(A)1m	75 ÷ 85
	Hz	2500 ± 100

MFRISOBELSL1F10100D2 • 24841

