


圆形预绝缘端头(TO-JTK型)

INSULATED RING TERMINALS

注: 红绿黄兰白黑任意选购。

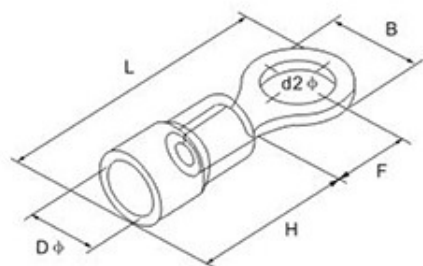

导线截面: 0.5~1.5mm²(美国线规22~16) 最大电流·I_{max}=19A

紫铜0.7mm

型 号 ITEMNO	尺 寸 DIMENSION							颜色 color
	美制螺 栓号	螺栓口直径 d2φ	B mm	L mm	F mm	H mm	Dφ mm	
RV 1.25-3	#4	3.2mm	5.7	17.8	4.95	10.0	4.3	红 red
RVS 1.25-3.5	#6	3.7mm	5.7	17.8	4.95			
RVM 1.25-3.5	#6	3.7mm	6.6	20.1	6.3			
RVL 1.25-3.5	#6	3.7mm	7.2	21.2	7.0			
RVS 1.25-4	#8	4.3mm	6.6	20.1	6.3			
RVL 1.25-4	#8	4.3mm	8.0	21.5	7.0			
RVS 1.25-5	#10	5.3mm	8.0	21.5	7.0			
RVL 1.25-5	#10	5.3mm	9.5	23.3	8.0			
RVLL 1.25-5	#10	5.3mm	11.6	27.5	11.1			
RVS1.25-6	1/4	6.5mm	9.5	23	8.0			
RV 1.25-6	1/4	6.5mm	11.6	27.5	11.1			
RV 1.25-8	5/16	8.4mm	11.6	27.5	11.1			
RVL 1.25-8	5/16	8.4mm	14.5	30.2	22.0			
RV 1.25-10	3/8	10.5mm	13.6	31.6	13.9			
RVL 1.25-10	3/8	10.5mm	19.2	35.0	16.0			
RV 1.25-12	1/2	13.0mm	19.2	35.0	16.0			

导线截面: 1.5~2.5mm²(美国线规16~14) 最大电流·I_{max}=27A

紫铜0.8mm

型 号 ITEMNO	尺 寸 DIMENSION							颜色 color
	美制螺 栓号	螺栓口直径 d2φ	B mm	L mm	F mm	H mm	Dφ mm	
RV 2-3	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	兰 blue
RVS 2-3.5	#6	3.7mm	6.6	17.8	4.3			
RVM 2-3.5	#6	3.7mm	6.6	21.0	7.0			
RVL 2-3.5	#6	3.7mm	8.5	22.5	7.75			
RVS 2-4	#8	4.3mm	6.6	21.0	7.0			
RVL 2-4	#8	4.3mm	8.5	22.5	7.75			
RVS 2-5	#10	5.3mm	8.5	22.5	7.75			
RVL 2-5	#10	5.3mm	9.5	22.5	7.25			
RVS2-6	1/4	6.5mm	9.5	25.0	10.0			
RV 2-6	1/4	6.5mm	12.0	27.6	11.0			
RV 2-8	5/16	8.4mm	12.0	27.6	11.0			
RVL 2-8	5/16	8.4mm	14.5	30.2	22.0			
RV 2-10	3/8	10.5mm	13.6	30.2	13.9			
RVL 2-10	3/8	10.5mm	19.2	35.0	16.0			
RV 2-12	1/2	13.0mm	19.2	35.0	16.0			

导线截面: 2.5~4mm²(美国线规14~12) 最大电流·I_{max}=37A

紫铜1.0mm

型 号 ITEMNO	尺 寸 DIMENSION							颜色 color
	美制螺 栓号	螺栓口直径 d2φ	B mm	L mm	F mm	H mm	Dφ mm	
RV 3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	黑 black
RVS 3.5-5	#10	5.3mm	8.0	24.5	7.7			
RVM 3.5-5	#10	5.3mm	9.5	25.5	8.3			
RVL 3.5-5	#10	5.3mm	12.0	27.9	7.7			
RV 3.5-6	1/4	6.5mm	12.0	27.9	7.7			
RV 3.5-8	5/16	8.4mm	15.0	32.0	13.5			
RV 3.5-10	3/8	10.5mm	15.0	32.0	13.5			

导线截面: 4~6mm²(美国线规12~10) 最大电流·I_{max}=48A

紫铜1.0mm

型 号 ITEMNO	尺 寸 DIMENSION							颜色 color
	美制螺 栓号	螺栓口直径 d2φ	B mm	L mm	F mm	H mm	Dφ mm	
RV 5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	黄 yellow
RVS 5.5-4	#8	4.3mm	7.2	21.4	5.9			
RVL 5.5-4	#8	4.3mm	9.5	25.5	8.3			
RV 5.5-5	#10	5.3mm	9.5	25.5	8.3			
RV 5.5-6	1/4	6.5mm	12.0	30.0	11.0			
RV 5.5-8	5/16	8.4mm	15.0	33.7	13.7			
RV 5.5-10	3/8	10.5mm	15.0	33.7	13.7			
RV 5.5-12	1/2	13.0mm	19.2	38.1	16.0			

> 叉形预绝缘端头(TU-JTK型)

INSULATED SPADE TERMINALS

注: 红绿黄兰白黑任意选购。



导线截面: 0.5~1.5mm²(美国线规22~16) 最大电流·I_{max}=19A


紫铜0.7mm

型 号 ITEMNO	尺 寸DIMENSION							颜色 COLOR
	美制螺 栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	Dφ mm	
SV 1.25-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.3	红 red
SVS 1.25-3.5	#6	3.7mm	5.7	21.2	6.5			
SVL 1.25-3.5	#6	3.7mm	6.4	21.2	6.5			
SVS 1.25-4	#8	4.3mm	6.4	21.2	6.5			
SVM 1.25-4	#8	4.3mm	7.2	21.2	6.5			
SVL 1.25-4	#8	4.3mm	8.1	21.2	6.5			
SVS 1.25-5	#10	5.3mm	8.1	21.2	6.5			
SVL 1.25-5	#10	5.3mm	9.5	21.2	6.5			
SVS 1.25-6	1/4	6.5mm	9.5	21.2	6.5			
SVL 1.25-6	1/4	6.5mm	12.0	27.2	11.0			
SV 1.25-8	5/16	8.5mm	14.0	29.0	12.5			

导线截面: 1.5~2.5mm²(美国线规16~14) 最大电流·I_{max}=27A

紫铜0.8mm

型 号 ITEMNO	尺 寸DIMENSION							颜色 COLOR
	美制螺 栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	Dφ mm	
SV 2-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.9	蓝 blue
SVS 2-3.5	#6	3.7mm	5.7	21.2	6.5			
SVL 2-3.5	#6	3.7mm	6.4	21.2	6.5			
SVS 2-4	#8	4.3mm	6.4	21.2	6.5			
SVM 2-4	#8	4.3mm	7.2	21.2	6.5			
SVL 2-4	#8	4.3mm	8.1	21.2	6.5			
SVS 2-5	#10	5.3mm	8.1	21.2	6.5			
SVL 2-5	#10	5.3mm	9.5	21.2	6.5			
SVS 2-6	1/4	6.5mm	9.5	21.2	6.5			
SVL 2-6	1/4	6.5mm	12.0	27.2	11.0			
SV 2-8	5/16	8.5mm	14.0	29.0	12.5			

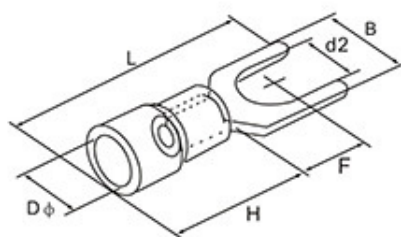

导线截面: 2.5~4mm²(美国线规14~12) 最大电流·I_{max}=37A

紫铜1.0mm


型 号 ITEMNO	尺 寸DIMENSION							颜色 COLOR
	美制螺 栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	Dφ mm	
SV3.5-3	#4	3.2mm	5.7	24.8	7.0	12.5	6.2	黑 black
SV 3.5-4	#8	4.3mm	8.0	24.8	7.0			
SV 3.5-5	#10	5.3mm	8.0	24.8	7.0			
SV 3.5-6	1/4	6.5mm	12.0	28.0	12.1			

导线截面: 4~6mm²(美国线规12~10) 最大电流·I_{max}=48A

紫铜1.0mm


型 号 ITEMNO	尺 寸DIMENSION							颜色 COLOR
	美制螺 栓号	螺栓口直径 d2	B mm	L mm	F mm	H mm	Dφ mm	
SV 5.5-3.5	#6	3.7mm	8.3	25.2	7.5	12.5	6.7	黄 yellow
SVS 5.5-4	#8	4.3mm	8.3	25.2	7.5			
SVL 5.5-4	#8	4.3mm	9.0	25.2	7.5			
SV 5.5-5	#10	5.3mm	9.0	25.2	7.5			
SVS 5.5-6	1/4	6.5mm	9.0	25.2	7.5			
SVL -5.5-6	1/4	6.5mm	12.0	31.2	12.0			
SV 5.5-8	1/4	8.4mm	14.0	30.0	11.5			

> 管形预绝缘端头(VE型)
INSULATED CORD END
TERMINALS



电线范围 24 A.W.G 0.34mm²	型号	尺 寸						法国颜色 德国颜色	使用压接 工具型号
		F	L	W	B	D	C		
24 A.W.G 0.34MM²	E0306	6.0	10.0	1.9	4.0	1.1	0.8		
	E0308	8.0	12.0						
22 A.W.G 0.5MM²	E0506	6.0	12.0	2.6	6.0	1.3	1.0	白色 橙色	使用0.5钳口
	E0508	8.0	14.0						
	E0510	10.0	16.0						
	E0512	12.0	18.0						
20 A.W.G 0.75mm²	E7506	6.0	12.3	2.8	6.3	1.5	1.2	蓝色 白色	使用0.75钳口
	E7508	8.0	14.3						
	E7510	10.0	16.3	2.8	6.3				
	E7512	12.0	18.3						
	E7518	18.0	24.3						
18 A.W.G 1.0mm²	E1006	6.0	12.3	3.0	6.3	1.7	1.4	红色 黄色	使用1.0钳口
	E1008	8.0	14.3						
	E1010	10.0	16.3	3.0	6.3				
	E1012	12.0	18.3						
	E1018	18.0	24.3						
16 A.W.G 1.5mm²	E1508	8.0	14.3	3.5	6.3	2.0	1.7	黑色 红色	使用1.5钳口
	E1510	10.0	16.3						
	E1512	12.0	18.3						
	E1515	15.0	21.3						
	E1518	18.0	24.3						
14 A.W.G 2.5mm²	E2508	8.0	15.4	4.0	7.4	2.6	2.3	灰色 蓝色	使用2.5钳口
	E2510	10.0	17.4						
	E2512	12.0	18.4						
	E2518	18.0	25.1						
	E2525	25.0	32.4						
12 A.W.G 4.0mm²	E4009	9.0	16.4	4.5	7.4	3.2	2.8	橙色 灰色	使用4.0钳口
	E4010	10.0	17.4						
	E4012	12.0	19.4						
	E4018	18.0	25.4						
10 A.W.G 6.0mm²	E6012	12.0	20.5	6.0	8.5	3.9	3.5	绿色 黑色	使用6.0钳口
	E6018	18.0	26.5						
8 A.W.G 10mm²	E10-12	12.0	22.0	7.5	8.8	4.9	4.5	棕色 乳白色	使用10钳口
	E10-18	18.0	26.0						
6 A.W.G 16mm²	E16-12	12.0	22.0	8.7	10.0	6.2	5.8	乳白色 绿色	使用16钳口
	E16-18	18.0	28.0						
4 A.W.G 25mm²	E25-15	15.0	27.0	11.0	12.0	7.9	7.5	黑色 棕色	
	E25-16	16.0	28.0						
	E25-18	18.0	30.0						
	E25-22	22.0	34.0						

> 针形预绝缘端头(TZ-JTK型)
INSULATED PIN TERMINALS

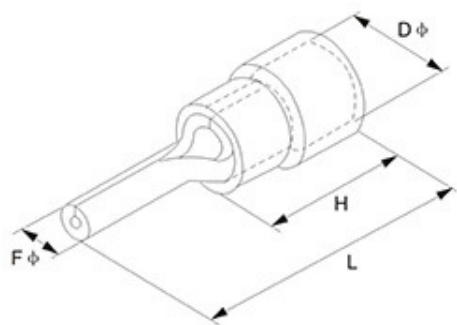

导线截面: $0.5 \sim 1.5\text{mm}^2$ (美国线规22~16) 最大电流 $\cdot I_{\text{max}}=19\text{A}$ 紫铜0.7mm

型 号 ITEM NO	尺 寸DIMENSION				颜色 color
	Fφ mm	L mm	H mm	Dφ mm	
PTV 1.25-9	1.9	19.0	10.0	4.3	红 Red
PTV 1.25-10	1.9	20.0			
PTV 1.25-12	1.9	22.0			
PTV 1.25-13	1.9	23.0			
PTV 1.25-18	1.9	28.0			

导线截面: $1.5 \sim 2.5\text{mm}^2$ (美国线规16~14) 最大电流 $\cdot I_{\text{max}}=27\text{A}$ 紫铜0.8mm

型 号 ITEM NO	尺 寸DIMENSION				颜色 color
	Fφ mm	L mm	H mm	Dφ mm	
PTV 2-9	1.9	19.0	10.0	4.9	兰 Blue
PTV 2-10	1.9	20.0			
PTV 2-12	1.9	22.0			
PTV 2-13	1.9	23.0			
PTV 2-18	1.9	28.0			

导线截面: $4 \sim 6\text{mm}^2$ (美国线规12~10) 最大电流 $\cdot I_{\text{max}}=48\text{A}$ 紫铜1.0mm


型 号 ITEM NO	尺 寸DIMENSION				颜色 color
	Fφ mm	L mm	H mm	Dφ mm	
PTV 3.5-12	2.8	24.5	12.5	6.2	黑 black
PTV 5.5-13	2.8	25.5	12.5	6.7	黄 Yellow
PTV 5.5-18	2.8	30.5			

材质：紫铜

> 长形全绝缘中间接头(TL-JTK型)
INSULATED VINYL BUTT CONNECTORS



型 号 ITEM NO	尺 寸 DIMENSION					最大电流 I _{max}	绝缘颜色 INSULATION color
	A、W、G	mm ²	B mm	dφ mm	L mm		
BV0.75	22-18	0.5-1.0	15.0	1.7	25.5	19A	红 Red
BV 1.25	22-16	0.75-1.5	15.0	1.9	26.0	19A	红 Red
BV 2	16~14	1.5-2.5	15.0	2.3	26.0	27A	兰 Blue
BV 3.5	14-12	2.5-4	15.0	3.0	26.0	37A	黑 Black
BV 5.5	12-10	4-6	15.0	3.4	26.0	48A	黄 Yellow
BV 8	#8	6-10	21.0	4.5	35.0	62A	红 Red
BV 14	#6	10-16	26.0	5.8	42.0	88A	兰 Blue
BV 22	#4	16-25	29.0	7.7	50.0	115A	黄 Yellow

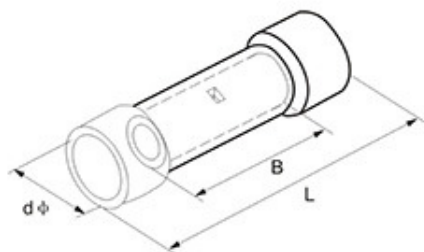

> 短形全绝缘中间接头(TL-JTK型)
INSULATED PARALLEL CONNECTORS

型 号 ITEM NO	尺 寸 DIMENSION					最大电流 I _{max}	绝缘颜色 Insulation Color
	A、W、G	mm ²	B mm	dφ mm	L mm		
PVT 1.25	22-16	0.5-1.5	8.0	1.9	16.0	19A	红 Red
PVT 2	16-14	1.5-2.5	8.0	2.3	16.0	27A	兰 Blue
PVT 5.5	12-10	4-6	8.5	3.4	20.5	48A	黄 Yellow

母预绝缘接头
INSULATED FEMALE DISCONNECTS

导线截面: 0.5~1.5mm²(美国线规22-16) 最大电流·Imax=10A 材质: 黄铜




型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺寸 DIMENSION				
			B	dφ	Dφ	L	H
	mm	mm	mm	mm	mm	mm	mm
FDD 1.25-110(5)	0.5×2.8	0.3	3.8	1.7	3.8	19.0	10.0
FDD 1.25-110(8)	0.8×2.8	0.3	3.8	1.7	3.8	19.0	
FDD 1.25-187(5)	0.5×4.75	0.35	5.6	1.7	3.8	19.0	
FDD 1.25-187(8)	0.8×4.75	0.35	5.6	1.7	3.8	19.0	
FDD 1.25-205	0.5×5.2	0.35	6.5	1.7	3.8	20.0	
FDD 1.25-250	0.8×6.35	0.4	7.4	1.7	3.8	21.0	

导线截面: 1.5~2.5mm²(美国线规16-14) 最大电流·Imax=15A



型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺寸 DIMENSION				
			B	dφ	Dφ	L	H
	mm	mm	mm	mm	mm	mm	mm
FDD 2-110(5)	0.5×2.8	0.3	3.8	2.3	4.3	19.0	10.0
FDD 2-110(8)	0.8×2.8	0.3	3.8	2.3	4.3	19.0	
FDD 2-187(5)	0.5×4.75	0.35	5.6	2.3	4.3	19.0	
FDD 2-187(8)	0.8×4.75	0.35	5.6	2.3	4.3	19.0	
FDD 2-205	0.5×5.2	0.35	6.5	2.3	4.3	20.0	
FDD 2-250	0.8×6.35	0.4	7.4	2.3	4.3	21.0	
FDD 2-312	0.8×8.0	0.4	9.0	2.3	4.3	23.0	

导线截面: 4~6mm²(美国线规12-10) 最大电流·Imax=24A

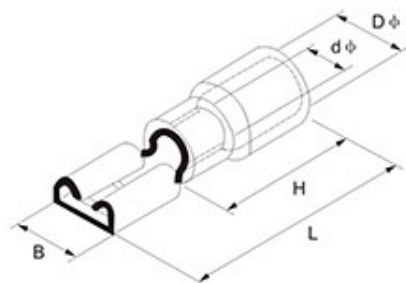

型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺寸 DIMENSION				
			B	dφ	Dφ	L	H
	mm	mm	mm	mm	mm	mm	mm
FDD 5.5-187	0.5×4.75	0.4	5.6	3.4	5.7	23.0	14.0
FDD 5.5-250	0.8×6.35	0.4	7.4	3.4	5.7	25.0	
FDD 5.5-312	0.8×8.0	0.5	9.0	3.4	5.7	27	
FDD 5.5-375	1.2×9.4	0.5	10.9	3.4	5.7	29.6	


公预绝缘接头
INSULATED MALE DISCONNECTS



导线截面: $0.5 \sim 1.5\text{mm}^2$ (美国线规22-16) 最大电流 $\cdot I_{\text{max}}=10\text{A}$ 材质: 黄铜

型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺 寸 DIMENSION				
			B	d ϕ	D ϕ	L	H
			mm	mm	mm	mm	mm
MDD 1.25-110(5)	0.5 $\times$ 2.8	0.5	2.8	1.70	4.3	17.7	10.0
MDD 1.25-110(8)	0.8 $\times$ 2.8	0.8	2.8	1.70	4.3	17.7	
MDD 1.25-187(5)	0.5 $\times$ 4.75	0.5	4.75	1.70	4.3	18.5	
MDD 1.25-187(8)	0.8 $\times$ 4.75	0.8	4.75	1.70	4.3	18.5	
MDD 1.25-250	0.8 $\times$ 6.3	0.4	6.3	1.70	4.3	21.0	

导线截面: $1.5 \sim 2.5\text{mm}^2$ (美国线规16-14) 最大电流 $\cdot I_{\text{max}}=15\text{A}$

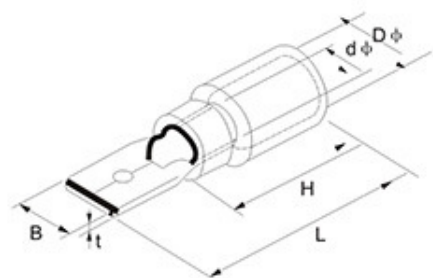

型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺 寸 DIMENSION				
			B	d ϕ	D ϕ	L	H
			mm	mm	mm	mm	mm
MDD 2-110(5)	0.5 $\times$ 2.8	0.5	2.8	2.3	4.3	17.7	10.0
MDD 2-110(8)	0.8 $\times$ 2.8	0.8	2.8	2.3	4.3	17.7	
MDD 2-187(5)	0.5 $\times$ 4.75	0.5	4.75	2.3	4.3	18.5	
MDD 2-187(8)	0.8 $\times$ 4.75	0.8	4.75	2.3	4.3	18.5	
MDD 2-250	0.8 $\times$ 6.35	0.4	6.35	2.3	4.3	21.0	


导线截面: $4 \sim 6\text{mm}^2$ (美国线规12-10) 最大电流 $\cdot I_{\text{max}}=24\text{A}$

型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺 寸 DIMENSION				
			B	d ϕ	D ϕ	L	H
			mm	mm	mm	mm	mm
MDD 5.5-187	0.5 $\times$ 4.75	0.5	4.75	3.4	5.7	23.0	14.0
MDD 5.5-250	0.8 $\times$ 6.3	0.4	6.3	3.4	5.7	25.0	



母全绝缘接头

FULLY VINYL INSULATED
DISCONNECTS

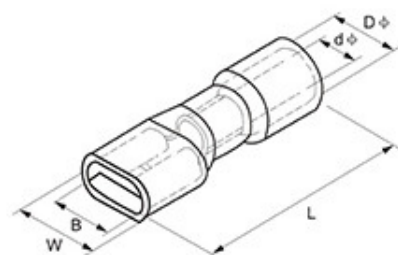

导线截面: 0.5~1.5mm²(美国线规22-16) 最大电流·Imax=10A


型 号 ITEM NO	NAMETAB 接插规格 mm	尺 寸 DIMENSION				
		W mm	B mm	D φ mm	d φ mm	L mm
FDFD 1.25-110(5)	0.5×2.8	6.2	3.2	4.0	1.7	19.0
FDFD 1.25-187(5)	0.5×4.75	7.8	5.0	4.0	1.7	20.0
FDFD 1.25-187(8)	0.8×4.75	7.8	5.0	4.0	1.7	20.0
FDFD 1.25-250	0.8×6.3	9.3	6.6	4.0	1.7	22.5

导线截面: 1.5~2.5mm²(美国线规16-14) 最大电流·Imax=15A

型 号 ITEM NO	NAMETAB 接插规格 mm	尺 寸 DIMENSION				
		W mm	B mm	D φ mm	d φ mm	L mm
FDFD 2-110(5)	0.5×2.8	6.2	3.2	4.5	2.3	19.0
FDFD 2-187(5)	0.5×4.75	7.8	5.0	4.5	2.3	20.0
FDFD 2-187(8)	0.8×4.75	7.8	5.0	4.5	2.3	20.0
FDFD 2-250	0.8×6.3	9.3	6.6	4.5	2.3	23.0

导线截面: 4~6mm²(美国线规12-10) 最大电流·Imax=24A

型 号 ITEM NO	NAMETAB 接插规格 mm	尺 寸 DIMENSION				
		W mm	B mm	D φ mm	d φ mm	L mm
FDFD 5.5-187(5)	0.5×4.8	7.8	5.0	5.7	3.4	23.0
FDFD 5.5-250	0.8×6.3	9.3	6.6	5.7	3.4	23.0
FDFD 5.5-375	1.2×9.4	13.0	10.9	5.7	3.4	30.0

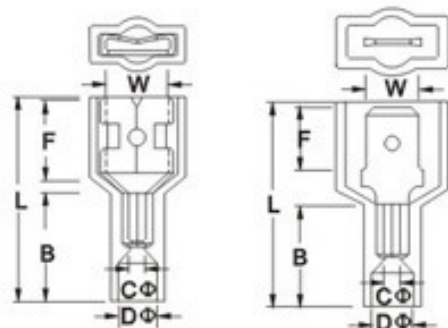

1

2

ITEM NO	NAMETAB	DIMENSION							A.W.G mm	COLOR
		W	F	L	B	D ϕ	C ϕ			
FDFNA 1.25-187	0.5 $\times$ 4.75	5.1	5.9	21.8	9.9	3.7		1		
FDFNA 1.25-250	0.8 $\times$ 6.3	6.6	8.8	21.3	10.2	3.9	1.7		22-16	紅
MDFNA 1.25-250		6.35	10.0	22.4				2	0.5-1.5	red
FDFNA 2-250	0.8 $\times$ 6.3	6.6	8.8	22.2	10.5	4.4	2.3	1	16-14	藍
MDFNA 2-50		6.35	10.0	22.4				2	1.5-2.5	blue

Max current; 10A material; copper insulating; nylon

ITEM NO	connecting spec.	Dimension(mm)								diagram	cable size (mm ²)	color
		W	F	L	B	D	C	T				
FDFNY 1.25-250	0.8 $\times$ 6.35	6.6	7.3	22.0	12.0	4.0	1.7	0.45	1		22-16 A.W.G	red
MDFNY 1.25-250		6.35	7.7	23.0	11.0	4.0	1.7	0.8	2		0.5-1.5 mm ²	

Max current; 15A material; copper insulating; nylon

ITEM NO	connecting spec.	Dimension(mm)								diagram	cable size (mm ²)	color
		W	F	L	B	D	C	T				
FDFNY 2-250	0.8 $\times$ 6.35	6.6	7.3	23.0	12.0	4.5	2.3	0.45	1		16-14 A.W.G	blue
MDFNY 2-250		6.35	7.7	24.0	11.0	4.5	2.3	0.8	2		0.5-2.5 mm ²	

Max current; 24A material; copper insulating; nylon

ITEM NO	connecting spec.	尺寸 Dimension(mm)								diagram	cable size (mm ²)	color
		W	F	L	B	D	C	T				
FDFNY 5.5-250	0.8 $\times$ 6.35	6.6	7.3	23.0	12.0	5.0	3.4	0.45	1		12-10 A.W.G	yellow
MDFNY 5.5-250		6.35	7.7	24.0	11.0	5.0	3.4	0.8	2		4-6 mm ²	



ELECTRONIC TECHNOLOGY SYSTEMS
DR. GENZ GMBH

COMPETENT BODY ACCREDITED TEST HOUSE

CERTIFICATE OF CONFORMITY

EU EMC - DIRECTIVE 89/336/EEC -

This certifies that the following designated product

TERMINAL
MODEL NO. : E

(Product identification)

complies with the essential protection requirements of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

This certificate is awarded following tests carried out on samples of the product referred to above. Assessment of compliance of the product with the requirements relating to electromagnetic compatibility was based on the following standards :

EN 60947 - 1 : 1999 + A2 : 2001

(Identification of regulations / standards)

This certificate is issued for
YUEQING KISE TERMINAL CO., LTD
No. 8 TENGFEI ROAD LIUSHI TOWN,
YUEQING, ZHEJIANG, CHINA

(Name / Address)

THE CERTIFICATION IS VALID ONLY IN ACCORDANCE WITH THE TEST REPORT NR. G4M20407-2239-E-16
THE CONFIRMATION IS VALID ONLY IF THE PRODUCT IS MANUFACTURED IN ACCORDANCE WITH THE TEST REPORT

GS LVD E/e-MARK FCC GSM UMTS CE-MARK SAR RADIO CB EMC DECT WLAN 3G Bluetooth R&TTE



This is the result of tests carried out on those samples of the product referred to above which were submitted for testing, in accordance with the specification for the respective standards. The certificate holder has the right to fix the ETS-MARK which shows the EMC segment onto each individual product in the series to which the inspection sample belongs, provided that the product is manufactured in accordance with the test report.



August 13, 2004

(Date)

Dr. Genz

Dr. Genz

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

STORKOWER STRASSE 38C, D-15526 REICHENWALDE B. BERLIN, GERMANY, PHONE +49-33631-888 00 FAX +49-33631-888 660



ELECTRONIC TECHNOLOGY SYSTEMS
DR. GENZ GMBH
COMPETENT BODY ACCREDITED TEST HOUSE

CERTIFICATE OF CONFORMITY

EU EMC - DIRECTIVE 89/336/EEC -

This certifies that the following designated product

TERMINAL
MODEL NO. : RV

.....
(Product identification)

complies with the essential protection requirements of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

This certificate is awarded following tests carried out on samples of the product referred to above.

Assessment of compliance of the product with the requirements relating to electromagnetic compatibility was based on the following standards :

EN 60947 - 1 : 1999 + A2 : 2001

.....
(Identification of regulations / standards)

This certificate is issued for
YUEQING KISE TERMINAL CO., LTD
NO. 8 TENGFEI ROAD LIUSHI TOWN,
YUEQING, ZHEJIANG, CHINA

.....
(Name / Address)

THE CERTIFICATION IS VALID ONLY IN ACCORDANCE WITH THE TEST REPORT NR. G4M20407-2239-E-16
THE CONFIRMATION IS VALID ONLY IF THE PRODUCT IS MANUFACTURED IN ACCORDANCE WITH THE TESTREPORT

GS LVD E/c-MARK FCC GSM UMTS CE-MARK SAR RADIO CB EMC DECT WLAN 3G Bluetooth R&TTE



This is the result of tests carried out on those samples of the product referred to above which were submitted for testing, in accordance with the specification for the respective standards. The certificate holder has the right to fix the ETS-MARK which shows the EMC segment onto each individual product in the series to which the inspection sample belongs, provided that the product is manufactured in accordance with the test report.



August 13, 2004

.....
(Date)

Dr. Genz

.....
Dr. Genz

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

STORKOWER STRASSE 38C, D-15526 REICHENWALDE B. BERLIN, GERMANY, PHONE + 49-33631-888 00 FAX + 49-33631-888 660