


BIP 92



BIP 92



> 75 dB max <

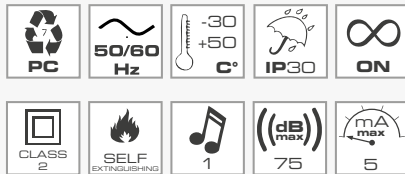

BIP 92 | PART NO

	GY	BK
12V ACDC	42318	33080
24V ACDC	42319	33081
48V ACDC	42320	33082
110V DC	42321	33083
110V AC	42322	33084
240V DC	42325	33088
240V AC	42326	33087

BIP 92

Sounder engineered for panel mount applications.

Developed with acoustic piezoelectrical capsule, the device generates a characteristic intermittent sound.

KEY CHARACTERISTICS

NUMBER OF TONES
1 (Intermittent Sound)

VOLTAGES
12V ACDC, 24V ACDC, 48V ACDC, 110V DC, 110V AC, 240V DC, 240V AC +/-10%

PROTECTION GRADE
IP30

OPERATING TEMPERATURE
-30/+50 °C



MECHANICAL FEATURES

PC body and locking
Flush mounting (holes Ø16mm - 22mm - 30mm) through the locking provided

ACOUSTIC FEATURES

Acoustic piezoelectrical capsule
Intermittent Sound
Frequency: 3600Hz

DRAWINGS, DIMENSIONS AND WEIGHTS



CERTIFICATIONS

