




**MICROROT A**  
BLISTER

**MICROROT FLX**  
FLEXIBLE ISO A  
(MOUNT ON  
ADAPTER SOCKET)

**MICROROT FLX**  
BLISTER

- > ECE R65 APPROVED <
- > EXCELLENT OPTICAL PERFORMANCE <
- > VERSATILE SOLUTIONS <

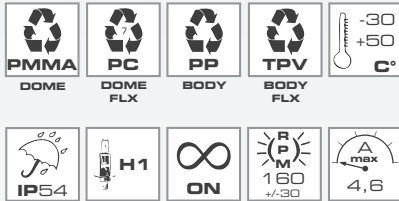

### ALSO AVAILABLE



**MICROROT ISO B**  
ISO B1  
(FLAT BASE)

**MICROROT B**  
(FLAT BASE)

**MICROROT A**  
ISO A BASE  
(MOUNT ON  
ADAPTER SOCKET)

**MICROROT 2M**  
(BASE WITH 2 MAGNETS,  
HELIX CABLE AND  
CIGARETTE LIGHTER PLUG)

**MICROROT M3V**  
(MAGNETIC BASE,  
3 SMALL SUCTION PAD,  
HELIX CABLE AND  
CIGARETTE LIGHTER PLUG)

### MICROROT | PART NO

	MICROROT (ROTATING BEACON)	
	12V (WITH BULB)	24V (WITH BULB)
	A	A
ISO B1	72144	72145
B	72307	72308
ISO A	72324	72325
2M	72313	72315
M3V	72365	72368
FLX	72332	72333
ISO A BL.	74901	-
FLX BL.	72390	-

## MICROROT

Approved rotating beacons with methacrylate dome. Fibreglass reinforced polypropylene base.

FLX: vibration-proof flexible rubber base and unbreakable polycarbonate dome.

Developed with halogen light source 55W and 70W.

\*21W version with french Homologation (T.P.F.S.L. 90125) available on request

### KEY CHARACTERISTICS

**VOLTAGE**  
12V DC (with bulb)  
24V DC (with bulb)

**MOTOR**  
Worm gear drive  
Sintered bush bearing  
Radio interference filter integrated in the motor

**LIGHT INTENSITY**  
According to ECE R65

**PROTECTION GRADE**  
IP54

**OPERATING TEMPERATURE**  
-30/+50 °C

### MECHANICAL FEATURES


MICROROT: methacrylate dome (screw in mount) and fibreglass reinforced polypropylene base

MICROROT FLX: flexible rubber base (according to ISO 4148, standard form A) and unbreakable polycarbonate dome

### OPTICAL FEATURES

Anodized aluminium reflector. Halogen light source H1 55W (12V) and 70W (24V)

### DRAWINGS, DIMENSIONS AND WEIGHT

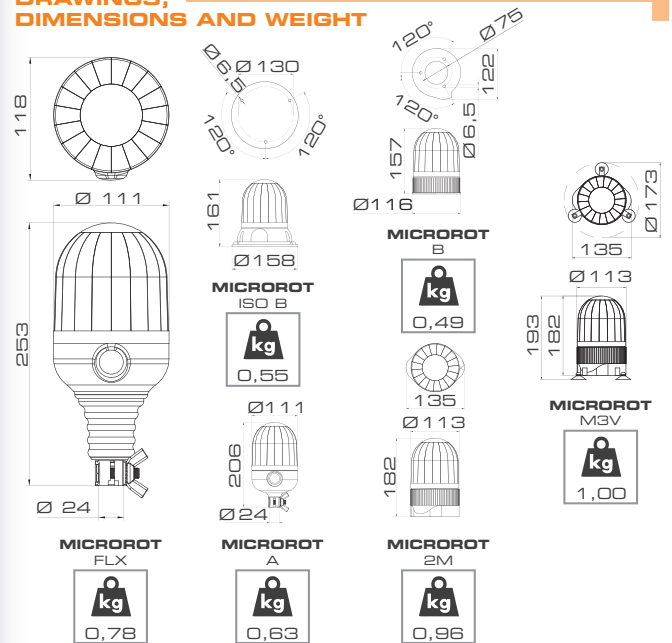

### CERTIFICATIONS



### HOMOLOGATION NUMBERS

MICROROT (ROTATING BEACON)	
ECE R65 A E2	0090121 A
EMC 2006/28/CE e3	03 1155 (12V)
EMC 2006/28/CE e3	03 1152 (24V)