

Cam switch

T-0001200330E1N1 (3 poles)

Dahlander 0 - ΔA - λ λA



Representative picture

Technical information**According to IEC 60947-3**

Rated thermal current (I _{th})	16 A
Rated insulation voltage (U _i)	500 V
Rated impulse withstand voltage (U _{imp})	6 kV

AC rated operational current

415 V	AC21A	16 A
415 V	AC22A	16 A
415 V	AC23A	10 A

Rated conditional short-circuit current	10 kA
---	-------

Rated maximum current (g _L -g _G)	25 A
---	------

Rated breaking capacity (400V; cos φ=0,45)	80 A
--	------

Rated short-time withstand current (1 sec)	240 A
--	-------

Mechanical durability (according to the standards, for other values please consult)	10000
---	-------

Rigid copper conductor	2x4 mm ²
------------------------	---------------------

Flexible copper conductor	2x2,5 mm ²
---------------------------	-----------------------

According to UL508 - CAN / CSA C22.2 N° 14

Rated thermal current (I _{th})	12 A
--	------

General use rating	300 Vac
--------------------	---------

AC rated operational power	3x240V	2 HP
----------------------------	--------	------

Normal service conditions:

Ambient air temperature (°C): -5°...+40°.

Maximum altitude: 2.000 m. Maximum humidity: 90%.

Pollution degree: 3 (standard for industrial applications).

Rated frequency at AC utilization categories: 50/60 Hz.

Rated duties at utilization categories AC21A, AC22A and AC23A: Continuing (8 hours); uninterrupted.


Standards**Quality Telergon SAU**

ISO 9001 & 14001


You can find detailed information about our products at www.telergon.com

Cam switch
T-0001200330E1N1



TELERGON, SAU
Data subject to change without
notice (printed: 30/05/2023)

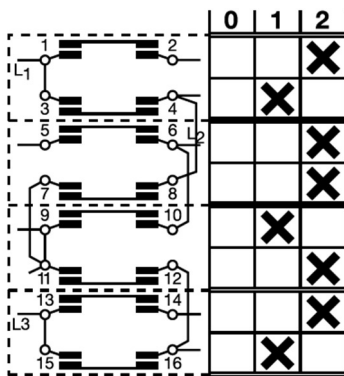

Scheme


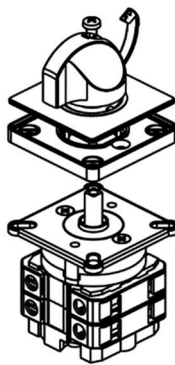


Fixing

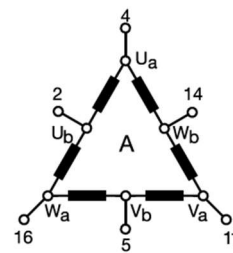




Positions

Dimensions

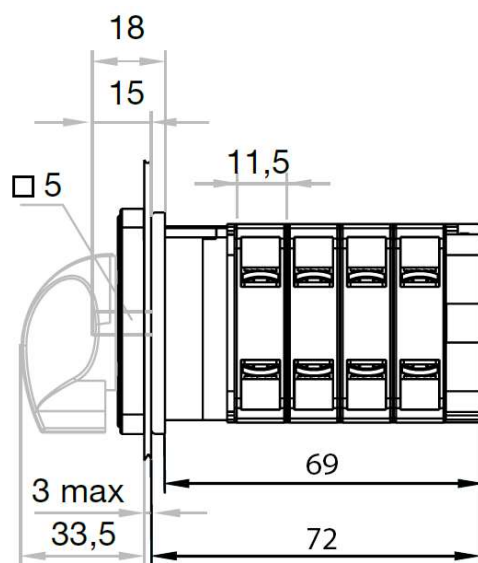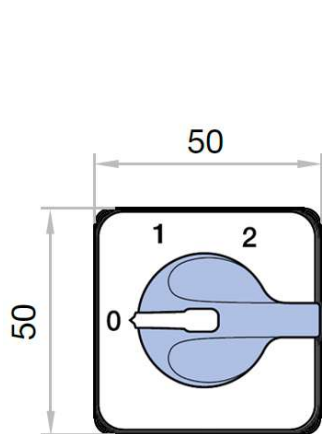

Frontal fixing
with 2 screws

Frontal fixing
with 4 screws

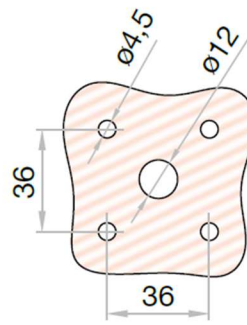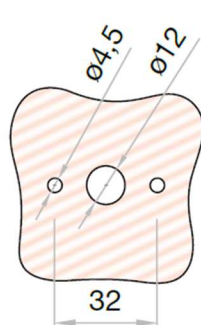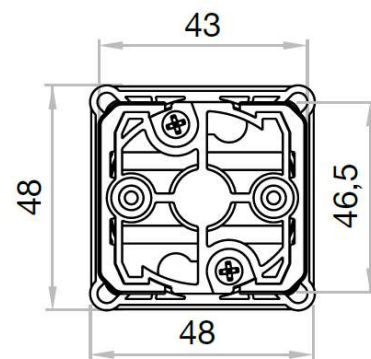

You can find detailed information about our products at www.telergon.com



Cam switch
T-0001200330E1N1

TELERGON, SAU
Data subject to change without
notice (printed: 30/05/2023)