**Cam switch** T-0004000330E1N1 (3 poles) Dahlander 0 - ΔΑ - λ λΑ



-- -



Representative picture

### Standards



## Quality Telergon SAU

ISO 9001 & 14001



## Technical information

Rated thermal current (Ith)	50 A
Rated insulation voltage (Ui)	690 V
Rated impulse withstand voltage (Uimp)	8 kV

# AC rated operational current

AC21A	50 A
AC22A	50 A
AC23A	32 A
ort-circuit current	10 kA
ent (gL-gG)	50 A
city (400V; cos	
	320 A
nstand current (1	
	800 A
(according to the	2
alues please	
	10000
tor	2x10 mm <sup>2</sup>
uctor	2x6 mm <sup>2</sup>
	AC22A AC23A ort-circuit current ent (gL-gG) city (400V; cos

### According to UL508 - CAN / CSA C22.2 Nº 14

Rated thermal current (Ith)	40 A
General use rating	600 Vac
AC rated operational power	
3x240V	15 HP


#### Normal service conditions:

Ambient air temperature (°C): -5°...+40°. Maximum altitude: 2.000 m. Maximum humidity: 90%. Pollution degree: 3 (standard for industrial applications). Rated frequency at AC utilization categories: 50/60 Hz. Rated duties at utilization categories AC21A, AC22A and AC23A: Continuing (8 hours); uninterrupted.

You can find detailed information about our products at www.telergon.com




**Cam switch** T-0004000330E1N1

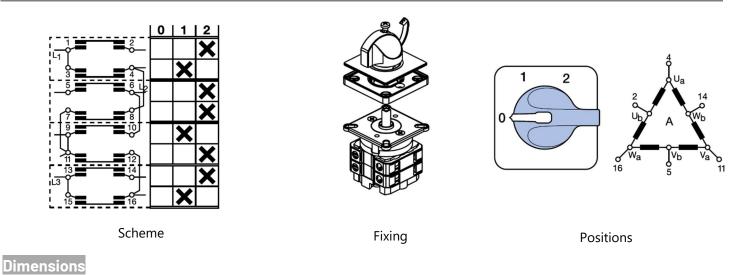



65 36 1 2 65 n



Frontal fixing with 2 screws c10 0 ( )0 45







You can find detailed information about our products at <u>www.telergon.com</u>



**Cam switch** T-0004000330E1N1

TELERGON, SAU Data subject to change without notice (printed: 30/05/2023)

You can find detailed information about our products at <u>www.telergon.com</u>



**Cam switch** T-0004000330E1N1 TELERGON, SAU Data subject to change without notice (printed: 30/05/2023)