



SERVICE PARTS LIST


BULLETIN NO.
54-06-2420

| SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS | | REVISED BULLETIN | DATE |
|--|----------------------------|---------------------------|-----------|
| M18™ Dual Power Flood Light | | | July 2020 |
| CATALOG NO. | 2366-20 | WIRING INSTRUCTION | |
| | STARTING SERIAL NO. | L62A | |

EXAMPLE:

| | |
|----|---|
| 00 | 0 |
|----|---|

 Component Parts (Small #)
 Are Included When Ordering
 The Assembly (Large #).

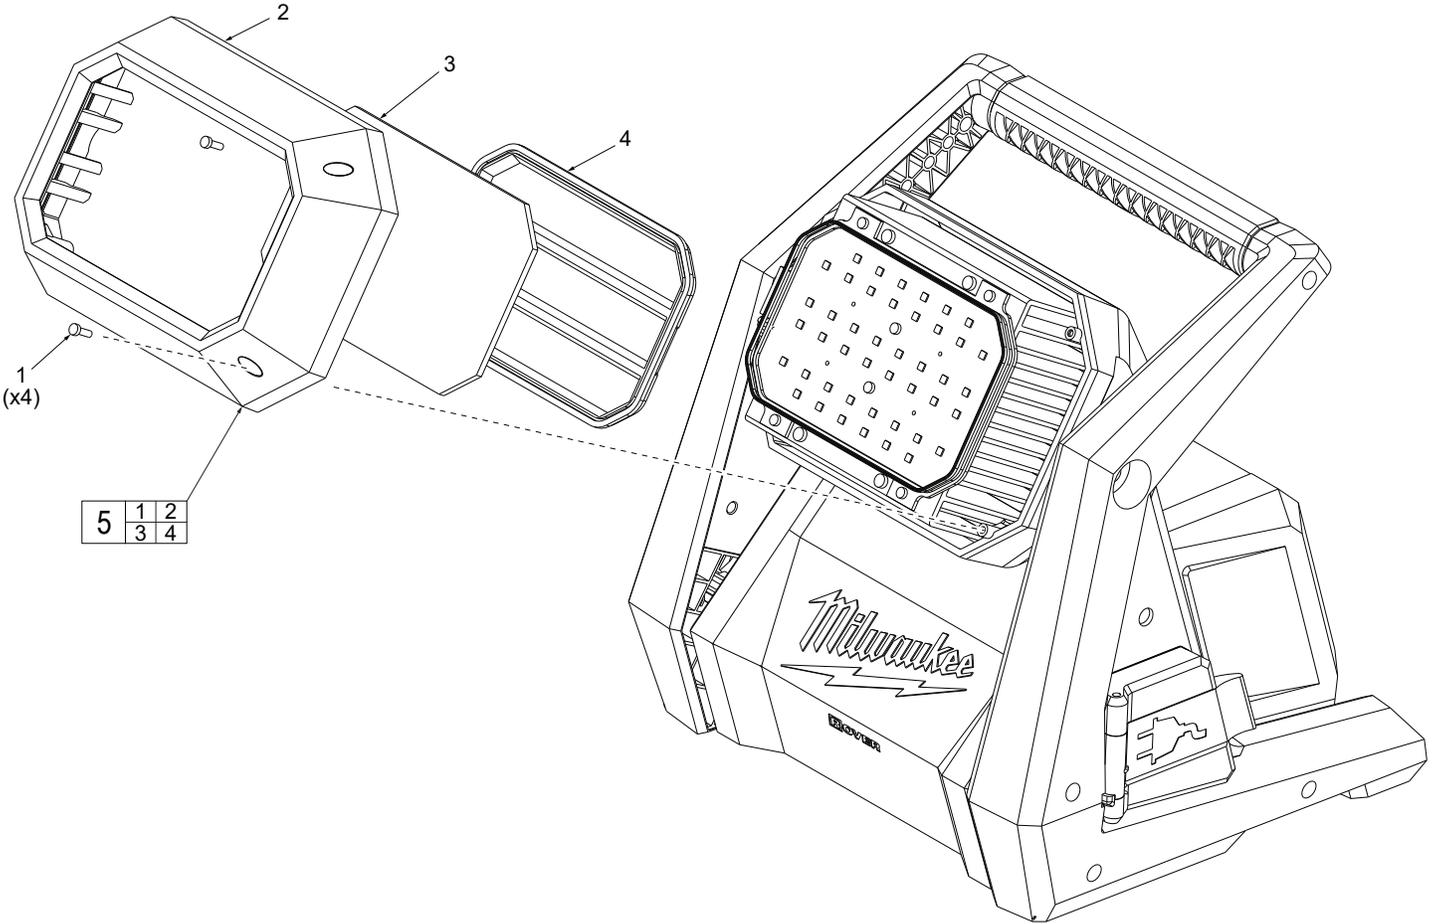

| FIG. | PART NO. | DESCRIPTION OF PART | NO. REQ. |
|------|------------|-------------------------------|----------|
| 1 | 05-74-0068 | PB2.6x8mm Screw | (4) |
| 2 | 14-30-0103 | Front Housing | (1) |
| 3 | 44-06-0043 | Lens | (1) |
| 4 | 44-79-0012 | Reflector | (1) |
| 5 | 14-46-0436 | Lens and Bezel Kit | (1) |
| 6 | 12-20-0311 | Service Nameplate (Not Shown) | (1) |

FIG. NOTES

- 6 A clean, dry surface is essential for proper performance for any adhesive system. The area intended for application of any adhesive label or nameplate must be prepared by cleaning with isopropyl alcohol. The solvent is to be applied with a clean, lint free applicator and the surface allowed to dry before applying the label or nameplate.