REV 1	M8 earthing terminal has been revised.	01/07/2011
REV 2		
REV 3		

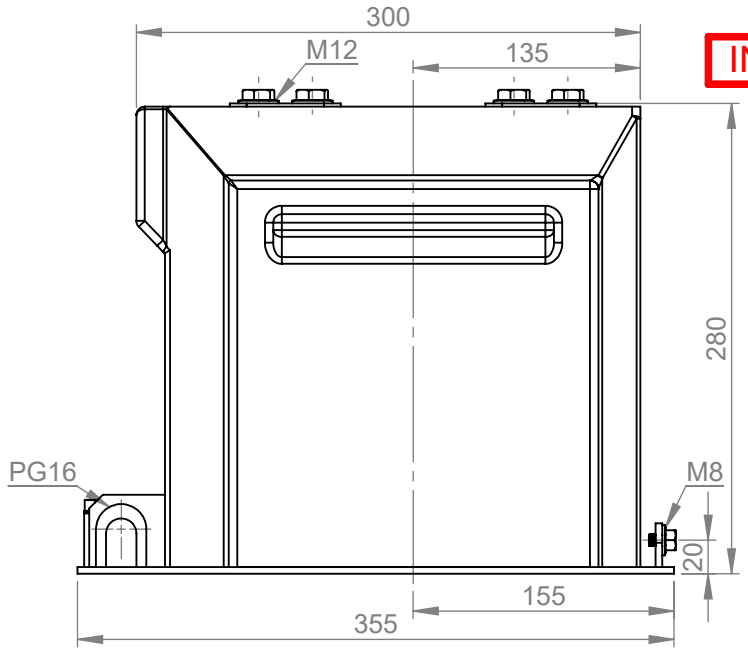

INFORMATION

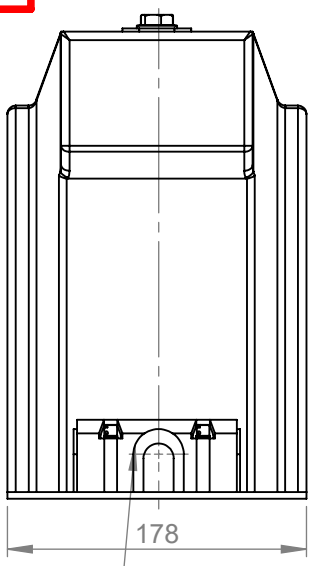

Secondary Terminals M5

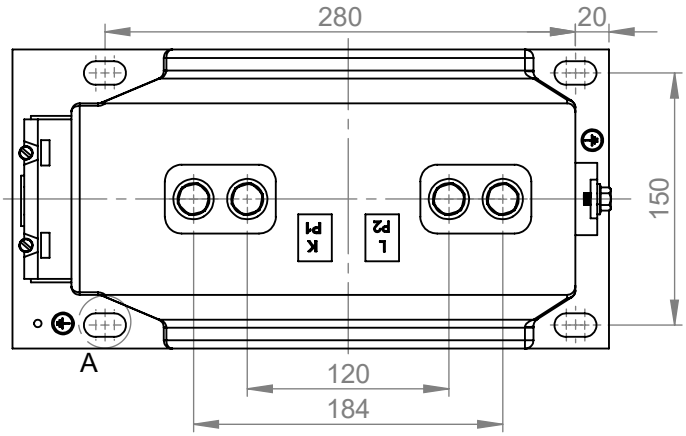

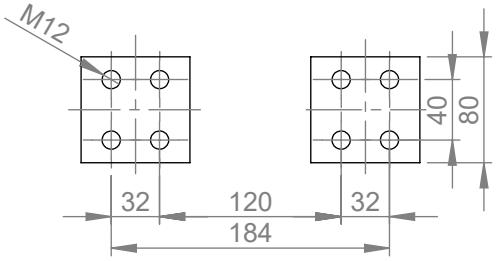

≥1500-2500A

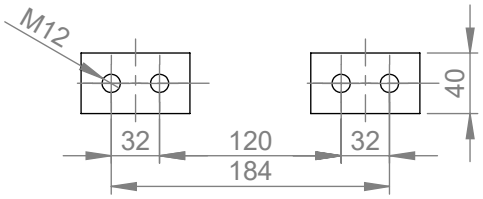

<1500A

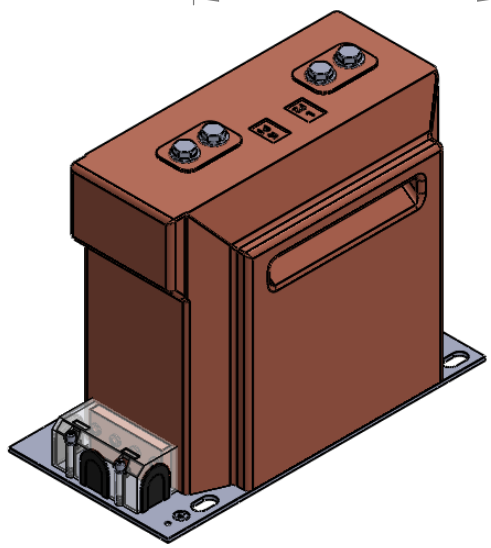



A-DETAIL
SCALE 3:1

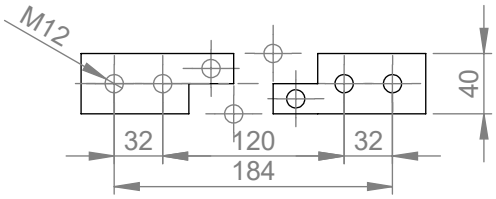

≤ 2x600A

TIGHTENING TORQUE (Nm)	Min.	Max.
M5 (Secondary Terminal)	2.5	3.5
M8 (Ground Terminal)	15	20
M12 (Primary Terminal)	60	70

NOTE: All dimensions are in mm.
Secondary terminals are at P1 (at P2 according to request).
Small deviations in dimensions and construction possible.

COPYRIGHT © ESİTAŞ A.Ş.
Esitas reserves the right to change the specifications and the dimensions of the goods.

						CAST RESIN
UNIT	PARTNAME	ITEM	MTRL.DIMEN.	MTRL.COD.	DRAWING NO.	MTRL.TYPE

		DATE	NAME	SIGNATURE
REV.	DRW.BY	01/07/2011	M.AKSU	
TOLERANCE DIN 7168-g	CONTROL	01/07/2011	T.DEMİRCAN	
	PREPARED BY		CHECK BY	

ESİTAS Instrument Transformers

RAW.MTRL.CODE	ALT SAC 3935
SEMI FINISHED MTRL.	

SCALE

ATB 20-BS
CURRENT TRANSFORMER

5383-00