
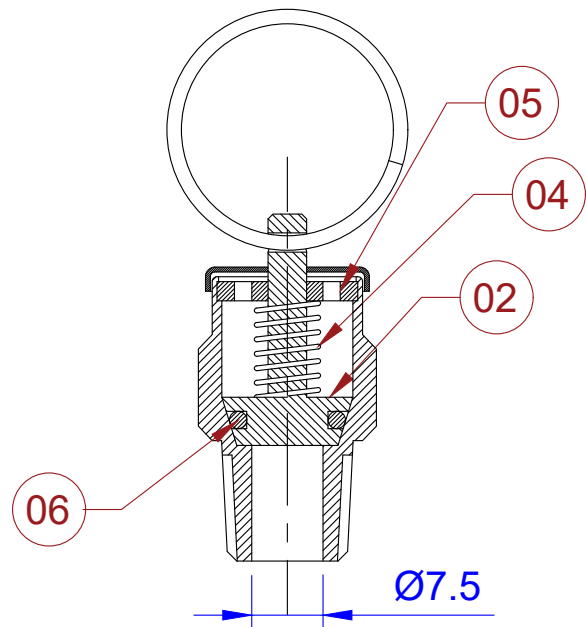
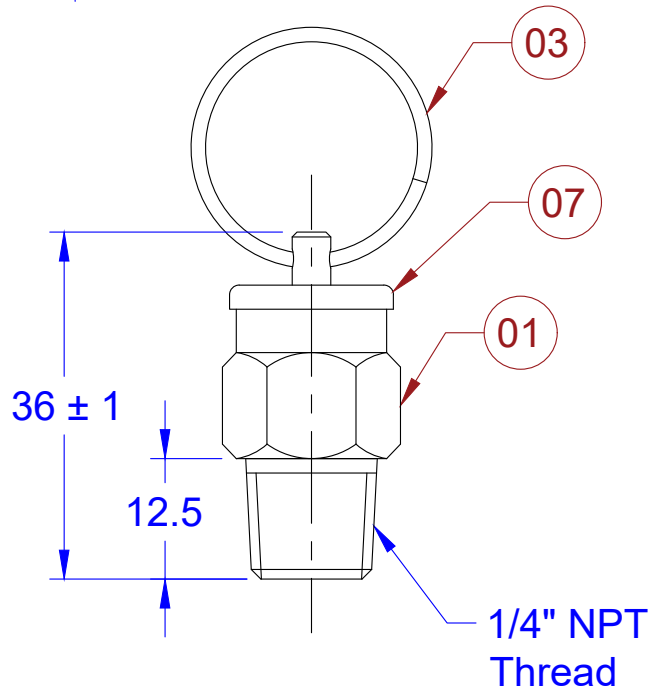


Notes :

- 1). Krytox Grease (Grade GPL-205 of Dupont) is applied on Viton O'Ring Seal, Spring & Spring Guide Part.
- 2). Factory Preset Pressure for automatic Venting & Resealing.
- 3). Viton O'Ring for Long Trouble free Service.
- 4). SS Pull Ring for Manual Bleeding.
- 5). Thread to be Teflon Taped.

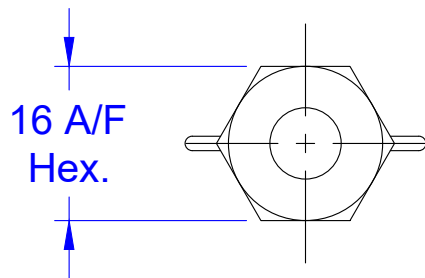

Signature
APROBADO
F.B.H.

Bill of Material

Part No.	Description	Qty.	Material
01	Body	01	Brass
02	Diaphragm	01	Brass
03	Split Pull Ring	01	Stainless Steel 304
04	Spring	01	Stainless Steel
05	Spring Holder	01	Brass
06	O'Rings	01	Viton
07	Cap	01	Brass

YOGYA ENTERPRISES - INDIASCALE
NTSTOLERANCE IS : 2102
f / (m) / c / v

TITLE :

Pressure Relief Device
1/4" NPT Thread

NAME	SIGN.	DATE
PREPARED BY: S.SAHU	<i>Signature</i>	29 / 08 / 20
CHECKED BY: PIYUSH	<i>Signature</i>	29 / 08 / 20
APPROVED BY: S.SURI	<i>Signature</i>	29 / 08 / 20
DRAWING NO. 4 1 0 3 0 1 0 0 0 1	REVISION: 0 0	SIZE: A 4
REF.		

ALL DIMENSIONS ARE IN mm.