

# 515CA



**Color:**  Yellow

**UPC Code:** 07847784178

**Country of Origin:** Mexico - \*Eligible for  
ARRA funded projects > \$7,443,000

**NEMA:** 5-15R



## Straight Blade Wiring Devices

### Brand Features

Leviton offers a large selection of 15, 20, 30 and 50 Amp Commercial Grade Straight Blade Plugs and Connectors, available in a wide variety of features. These rugged performers are moisture, chemical and abuse-resistant. And they're ideal for indoor and outdoor use. Our EPTR rubber-backed plugs and connectors stand up to rough use, protecting against dirt and moisture. The deep-slotted, backed-out terminal screws draw backwire clamps securely over stripped leads for maximum conductivity.

### Item Description

15 Amp, 125 Volt, NEMA 5-15R, 2P, 3W, Connector, Straight Blade, Armored, Grounding - Steel

### Technical Information

#### Electrical Specifications

**Grounding:** Grounding

**Amperage:** 15 Amp

**Voltage:** 125 Volt

**NEMA:** 5-15R

**Pole:** 2

**Wire:** 3

**Dielectric Voltage:** Withstands 2000V per UL498

**Current Interrupting:** Certified for current interrupting at full rated current

**Temperature Rise:** Max 30C after 50 cycles OL at 150 percent rated current

#### Environmental Specifications

**Flammability:** Rated V-2 per UL94

**Operating Temperature:** -40C to 60C

#### Material Specifications

**Body Material:** PVC / Steel

**Blades/Contacts:** Brass

**Assembly Screws:** Steel, Zinc Plated

**Color:** Yellow

#### Mechanical Specifications

**Terminal ID:** Brass-Hot, Green-Ground, Silver-Neutral

**Terminal Accom.:** 18-12 AWG

**Product ID:** Ratings and NEMA I.D. permanently marked on device

**Cord Range:** .245 - .700

#### Product Features

**NEMA:** 5-15R

**Color:** Yellow

#### Standards and Certifications

**NEMA:** WD-6

**ANSI:** C-73


**UL498:** File E13393

**CSA C22.2 No. 42:** File LR-406


**NOM:** 057

**Warranty:** 10-Year Limited

## Dimensional Diagram

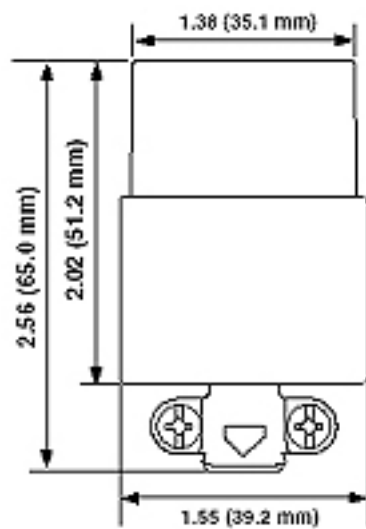

## Wiring Diagram

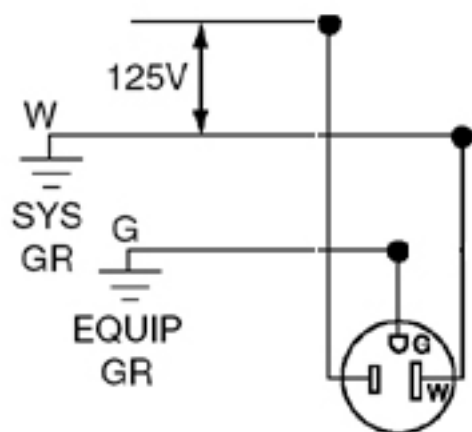

5-15R

