

PVC-Coated Conduit and Accessories

PVC coating evenly molded around saddle prevents exposure of metal — an Ocal[®] exclusive!

Ocal[®] PVC-Coated Beam Clamps and U-Bolts

- Beam clamps support and attach conduit runs to structural beams
- Molded right-angle beam clamps and U-bolts provide extra protection
- Encapsulated, hex-shaped nuts fit standard wrenches
- Stainless steel hardware included
- Parallel (PAR) and edge (EC) clamps feature nominal .015" (15 mil) PVC coating for corrosion protection
- Right-Angle clamps (RA) and U-Bolts (UB) feature nominal .040" (40 mil) PVC coating for corrosion protection



Parallel (PAR)



Edge (EC)

PVC-Coated Beam Clamps

CAT. NO.			PIPE SIZE	
RIGHT ANGLE	PARALLEL	EDGE	IN.	METRIC SIZE DESIGNATOR*
RA1/2- ₋	PAR1/2- ₋	EC1/2- ₋	½	16
RA3/4- ₋	PAR3/4- ₋	EC3/4- ₋	¾	21
RA1- ₋	PAR1- ₋	EC1- ₋	1	27
RA1-1/4- ₋	PAR1-1/4- ₋	EC1-1/4- ₋	1¼	35
RA1-1/2- ₋	PAR1-1/2- ₋	EC1-1/2- ₋	1½	41
RA2- ₋	PAR2- ₋	EC2- ₋	2	53
RA2-1/2- ₋	PAR2-1/2- ₋	—	2½	63
RA3- ₋	PAR3- ₋	—	3	78
RA3-1/2- ₋	PAR3-1/2- ₋	—	3½	91
RA4- ₋	PAR4- ₋	—	4	103

CAT. NO.

RA1-

COLOR

—

= space for color identifier

G = Gray

W = White

B = Blue

Custom colors also available.



Right Angle (RA)

PVC-Coated U-Bolts

CAT. NO.	PIPE SIZE		“A” DIMENSION	
	IN.	METRIC SIZE DESIGNATOR*	IN.	MM
UB1/2- ₋	½	16	1.38	34.93
UB3/4- ₋	¾	21	1.56	39.69
UB1- ₋	1	27	1.84	46.83
UB1-1/4- ₋	1¼	35	2.19	55.56
UB1-1/2- ₋	1½	41	2.50	63.50
UB2- ₋	2	53	2.97	75.41
UB2-1/2- ₋	2½	63	3.47	88.11
UB3- ₋	3	78	4.09	103.98
UB3-1/2- ₋	3½	91	4.59	116.68
UB4- ₋	4	103	5.09	129.38
UB5- ₋	5	129	6.63	168.28
UB6- ₋	6	155	8.00	203.20

* Metric size designator (ANSI C80.1-1994).

ITEM

UB 1-

SIZE

—


= space for color identifier

G = Gray

W = White

B = Blue

Custom colors also available.

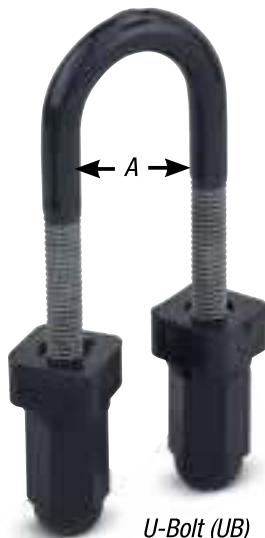

U-Bolt (UB)